



Dojo - HTML Template

created: 21/07/2015 latest update: 21/07/2015 by: createIT

Support (<http://createit.support>)

Our Blog (<http://blog.createit.pl/>)

Thank you for purchasing this theme. If you have any questions that are beyond the scope of this help file, please feel free to email via the user page contact form on this page. Thanks so much!

Scope of free support

We can help you with:

- Responding to questions or problems regarding the item and its features
- Fixing any discovered item's bugs
- Providing updates to ensure compatibility with new software versions

HTML Structure

This theme is built upon bootstrap framework and is fully responsive. It adapts to window resolution and looks good on all devices including iPad and iPhone.

See for yourself (resize your browser).

If you would like to read more
about bootstrap framework click here :

Bootstrap Documentation
(<http://getbootstrap.com/css/>)

CSS Files and Structure

CSS Files & Structure

We've included 2 files.

bootstrap.css contains Bootstrap 3 Library.

style.css file contains general styles.

- 1. Variables
- 2. Mixins
- 3. Animate.css
- 4. Font Awesome
- 5. Menu
- 6. Yamm Menu
- 7. Social Icons
- 9. Media Section
- 10. Typography
- 11. Slider
- 12. Buttons
- 13. Media Object
- 14. News
- 15. Widgets
- 16. Call To Action
- 17. Testimonials
- 18. Pricing Tables
- 19. Portfolio
- 20. Form
- 21. Breadcrumb
- 22. Person Box
- 23. Accordion
- 24. Counters
- 25. Color Box
- 26. Twitter
- 27. Timeline
- 28. Modal
- 29. Light Gallery
- 30. Gray

- 31. Blog
- 32. Events
- 33. Calendar
- 34. Tables
- 35. Icon Box
- 36. Progress Bar
- 37. Utilities

Main Menu structure

For different topBars you can use this classes, add one of them to **.ct-topBar** element:

- ct-topBar--type1
- ct-topBar--type2

ct-topBar--type1:



```

1. <div class="ct-topBar ct-topBar--type1">
2.     <div class="navbar navbar-default">
3.         <div class="container">
4.
5.             [content]
6.
7.         </div>
8.     </div>
9. </div>
10.
  
```

ct-topBar--type2:



```


1. <div class="ct-topBar ct-topBar--type2">
2.     <div class="navbar navbar-default">
3.         <div class="container">
4.
5.             [content]
6.
7.         </div>
8.     </div>
9. </div>
10.
  
```

For different navBars you can use this markup:

- navbar left
- navbar center
- navbar right

- navbar transparent

navbar left:

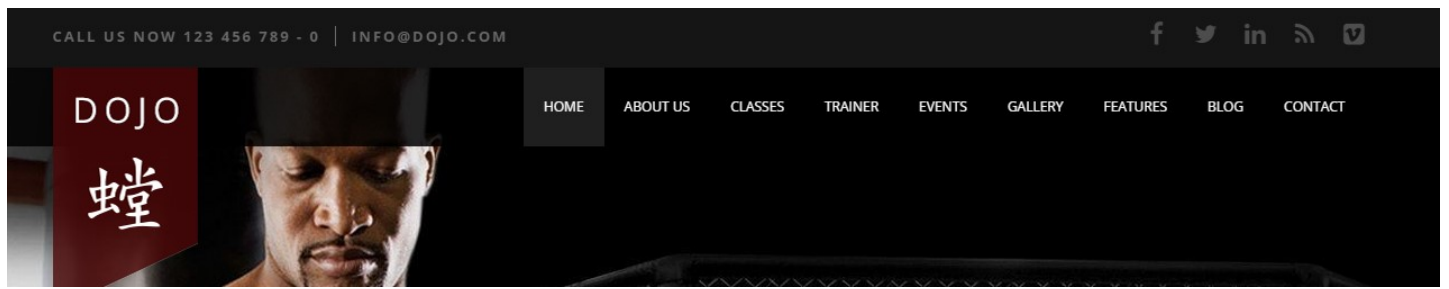


```

1. <nav class="navbar navbar-default navbar--type1 yamm navbar-logo--left">
2.     <div class="container ct-navbar-container">
3.
4.         <div class="navbar-header navbar-left">
5.             <a class="navbar-brand" href="index.html">
6.                 
7.             </a>
8.         </div>
9.
10.        <div class="navbar-block navbar-right">
11.            <div class="navbar-block-inner">
12.                <div id="nav-icon" class="nav-icon--right">
13.                    <span></span>
14.                    <span></span>
15.                    <span></span>
16.                    <span></span>
17.                </div>
18.            </div>
19.        </div>
20.
21.        <ul class="nav navbar-nav ct-navbar--fadeIn navbar-right">
22.            <li class="dropdown">
23.                <a href="index.html" class="dropdown-toggle">Home</a>
24.                <ul class="dropdown-menu dropdown-menu--type2" role="menu">
25.                    <li class="yamm-outer">
26.                        <div class="yamm-content">
27.                            <div class="row">
28.                                <div class="col-md-3 col-sm-6">
29.                                    <h6><span>default Homes</span></h6>
30.                                    <ul class="list-unstyled">
31.
32.                                        [content]
33.
34.                                    </ul>
35.                                </div>
36.
37.                                <div class="col-md-3 col-sm-6">
38.                                    <h6><span>Thematics</span></h6>
39.                                    <ul class="list-unstyled">
40.
41.                                        [content]
42.
43.                                    </ul>
44.                                </div>
45.
46.                                <div class="col-md-3 col-sm-6">
47.                                    <h6><span>Headers</span></h6>
48.                                    <ul class="list-unstyled">
49.
50.                                        [content]
51.
52.                                    </ul>
53.                                </div>
54.
55.                                <div class="col-md-3 col-sm-6">
56.                                    <h6><span>Widgetized</span></h6>

```

```
57.
58.             [content]
59.
60.             </div>
61.         </div>
62.     </div>
63.     <div class="ct-megamenu-footer">
64.         <p>Dojo <span>megamenu</span></p>
65.     </div>
66.     </li>
67. </ul>
68. </li>
69.
70.     <li><a href="contact.html.">Contact</a></li>
71. </ul>
72. </div>
73. </nav>
74.
```

navbar left:

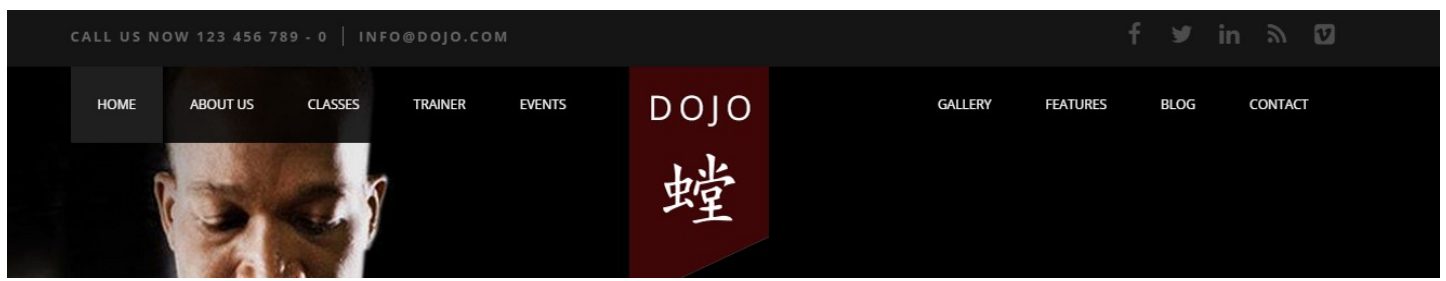


```

1. <nav class="navbar navbar-default navbar-logo--center navbar--type1 yamm">
2.   <div class="container ct-navbar-container">
3.
4.
5.     <ul class="nav navbar-nav ct-navbar--fadeIn navbar-left">
6.
7.       [content ul 1]
8.
9.     </ul>
10.
11.    <div class="navbar-block navbar-right">
12.      <div class="navbar-block-inner">
13.        <div id="nav-icon" class="nav-icon--right">
14.          <span></span>
15.          <span></span>
16.          <span></span>
17.          <span></span>
18.        </div>
19.      </div>
20.    </div>
21.
22.    <div class="navbar-header">
23.      <a class="navbar-brand" href="index.html">
24.        
25.      </a>
26.    </div>
27.
28.    <ul class="nav navbar-nav ct-navbar--fadeIn navbar-right">
29.
30.      [content ul 2]
31.
32.    </ul>
33.
34.  </div>
35. </nav>
36.

```

navbar right:

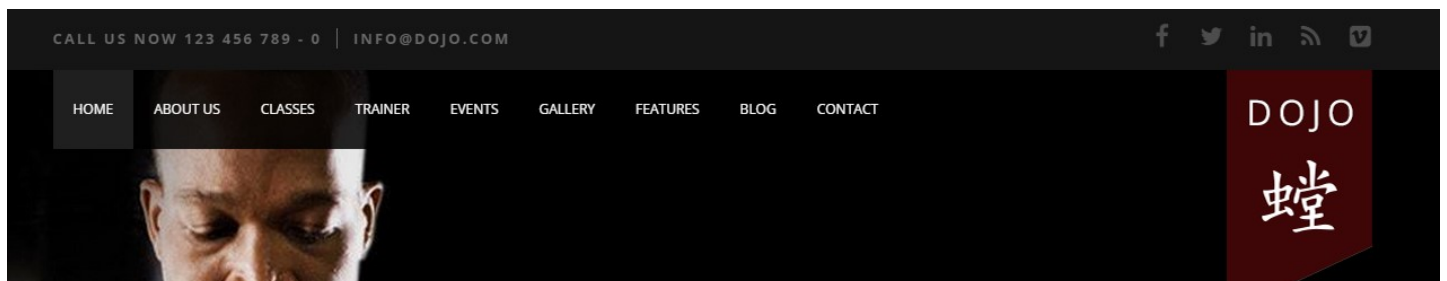


```

1. <nav class="navbar navbar-default navbar--type1 yamm navbar-logo--right">
2.   <div class="container ct-navbar-container">
3.
4.     <div class="navbar-block navbar-right">
5.       <div class="navbar-block-inner">
6.         <div id="nav-icon" class="nav-icon--right">
7.           <span></span>
8.           <span></span>
9.           <span></span>
10.          <span></span>
11.        </div>
12.      </div>
13.    </div>
14.
15.    <div class="navbar-header navbar-right">
16.      <a class="navbar-brand" href="index.html">
17.        
18.      </a>
19.    </div>
20.
21.
22.    <ul class="nav navbar-nav ct-navbar--fadeIn navbar-left">
23.
24.      [content]
25.
26.    </ul>
27.  </div>
28. </nav>
29.

```

navbar transparent:

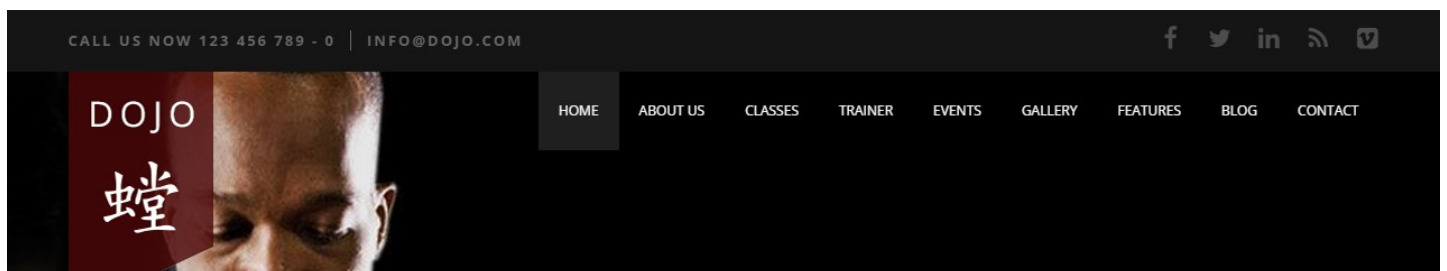


```
1. <nav class="navbar navbar-default ct-navbar--transparent navbar--type1 yamm navbar-lo
go--left">
2.     <div class="container ct-navbar-container">
3.
4.         <div class="navbar-header navbar-left">
5.             <a class="navbar-brand" href="index.html">
6.                 
7.             </a>
8.         </div>
9.
10.        <div class="navbar-block navbar-right">
11.            <div class="navbar-block-inner">
12.                <div id="nav-icon" class="nav-icon--right">
13.                    <span></span>
14.                <span></span>
15.                <span></span>
16.                <span></span>
17.            </div>
18.        </div>
19.    </div>
20.
21.    <ul class="nav navbar-nav ct-navbar--fadeIn navbar-right">
22.
23.        [content]
24.
25.    </ul>
26. </div>
27. </nav>
28.
```

Modal

If you want add modal box add this content inside **<main>** tag



JOIN TO THE TEAM

Fill in the contact form if you want join us.

or
contact Laura via



```

<div class="modal fade ct-modal" id="modal1" tabindex="-1" role="dialog">
  <div class="modal-dialog ct-modalDialog">
    <div class="modal-content ct-modalContent">
      <div class="modal-header ct-modalHeader">
        <button type="button" class="close" data-dismiss="modal" aria-label="Close"><span aria-hidden="true">x</span></button>
        <h2 class="ct-headline text-center">

          </h2>
      </div>
      <div class="modal-body ct-modalBody">
        <div class="ct-modalBody-header ct-u-marginBottom60">

          [header content]

        </div>

        <div class="ct-modalBody-content">

          [body content]

        </div>

      </div>
      <div class="modal-footer ct-modalFooter">

        [footer content]

      </div>
    </div>
  </div>
</div>

```

And this when you want invoke modal for example inside **<a>** tag:

```

<div class="text-center">
  <a href="#" class="btn ct-btn--o btn-default" data-toggle="modal" data-target="#modal1"><span>join us</span></a>
</div>

```

SCRIPT For Modal box:

```

var $modal = jQuery('.ct-modal');

$modal.each(function(){
    var $this = jQuery(this);
    var $modalDialog = $this.find('.ct-modalDialog');
    var $modalContent = $modalDialog.find('.ct-modalContent');
    var $modalContentHeight = $modalContent.height();

    $modalDialog.css("height", $modalContentHeight + "px");

    if($deviceheight < $modalContentHeight){
        $modalDialog.css({
            "position": "static",
            "padding-top": "17px"
        })
    }
});

```

News

For different news style you can use this classes, add one of them to **.ct-news-item** element:

- ct-news-item--type1
- ct-news-item--type2



```

<section class="ct-js-news-container" data-height="325" data-background="#000">
  <div class="container">
    <div class="ct-news">
      <div class="ct-js-news-row ct-news-row">
        <div class="row">
          <div class="col-md-6">
            <article class="ct-news-item ct-news-item--type1 animated" data-fx
="bounce" data-time="1500">
              <div class="ct-news-item-header">
                <h4 class="ct-news-item-headerText text-uppercase"><span>W
elcome To Dojo</span></h4>
              </div>
              <div class="ct-news-item-body">
                [content]
              </div>
            </article>
          </div>
          <div class="col-md-6">
            <article class="ct-news-item ct-news-item--type2 animated" data-fx
="bounce" data-time="1200">
              <div class="ct-news-item-header">
                <h4 class="ct-news-item-headerText text-uppercase"><span>R
ecent News</span></h4>
                <p class="text-uppercase">See All News</p>
              </div>
              <div class="ct-news-item-body">
                [content]
              </div>
            </article>
          </div>
        </div>
      </div>
    </div>
  </div>
</section>

```

SCRIPT for news item:

```

function alignRowHeight(contentName, rowName, itemName, desibleRes){
  "use strict";

  if(!desibleRes)
    desibleRes = 0;

  if($devicewidth < desibleRes)
    return;

  $(". " + contentName).each(function(){
    var row = $(this).find("." + rowName);

    row.each(function(){
      var maxHeight = 0;

      var items = $(this).find("." + itemName);

      items.each(function(){
        var mHeight = $(this).css("height");

        if(parseInt(mHeight, 10) > maxHeight){
          maxHeight = mHeight;
        }
      });

      items.each(function(){
        $(this).css("height", maxHeight);
      });
    });
  });
}

alignRowHeight("ct-js-news-container", "ct-js-news-row", "ct-news-item");

```

Call To Action

For different Call To Action style you can use this classes, add one of them to **.ct-callToAction** element:

- ct-callToAction--type1
- ct-callToAction--type2
- ct-callToAction--type3

[PURCHASE NOW](#)

```
<section class="ct-callToAction ct-callToAction--type1">
  <div class="ct-callToAction-inner">

    [content]

  </div>
</section>
```

Testimonials

For different Testimonials style you can use this classes, add one of them to **.ct-testimonial-item** element:

- ct-testimonial-item--small
- ct-testimonial-item--large



Mixed Martial Arts

with

Anthony B. Laura James

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas.



MUAY THAI BOXING

with

BUAKAW P. P. ANTHONY B.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor.



BRAZILIAN JUI-JITSU

with

FABRICIO DA SILVA


Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor.

PRAYING MANTIS KUNG-FU

with

JET LEE, BRUCE LEE

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor.

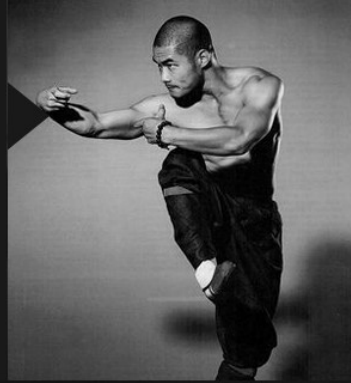

KICK BOXING MEN & WOMAN

with

LAURA JAMES

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor.




```

<div class="ct-testimonial ct-js-testimonial">
  <div class="ct-js-testimonial-row ct-testimonial-row">
    <article class="ct-testimonial-item ct-testimonial-item--large animated" data-fx
="fadeInDown" data-time="400">
      <a href="#">
        <div class="ct-testimonial-item-media">
          <figure>
            
          </figure>
        </div>
        <div class="ct-testimonial-item-content">

          [content]

        </div>
      </a>
    </article>

    <article class="ct-testimonial-item ct-testimonial-item--small animated" data-fx
="fadeInDown" data-time="400">
      <a href="#">
        <div class="ct-testimonial-item-media">
          <figure>
            
          </figure>
        </div>
        <div class="ct-testimonial-item-content">
          <h4 class="text-uppercase text-center ct-testimonial-item-header">
            <span>Mixed Martial Arts</span>
            <small><span>with</span></small>
            <small><span>Anthony B. Laura James</span></small>
          </h4>

          <p class="ct-testimonial-item-text text-center">
            Pellentesque habitant morbi tristique senectus et netus et malesua
da fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor
sit amet, ante. Donec eu libero sit amet quam egestas.
          </p>
        </div>
      </a>
    </article>
  </div>

  <div class="ct-js-testimonial-row ct-testimonial-row">
    <article class="ct-testimonial-item ct-testimonial-item--small animated" data-fx
="fadeInLeft" data-time="300">
      <a href="#">
        <div class="ct-testimonial-item-media">

```

```

        <figure>
            
        </figure>
    </div>
    <div class="ct-testimonial-item-content">

        [content]

    </div>
</a>
</article>

<article class="ct-testimonial-item ct-testimonial-item--small animated" data-fx
="fadeInLeft" data-time="300">
    <a href="#">
        <div class="ct-testimonial-item-media">
            <figure>
                
            </figure>
        </div>
        <div class="ct-testimonial-item-content">

            [content]

        </div>
    </a>
</article>

</div>

</div>

```

SCRIPT for testimonials:

```

function alignRowHeight(contentName, rowName, itemName, desibleRes){
  "use strict";

  if(!desibleRes)
    desibleRes = 0;

  if($devicewidth < desibleRes)
    return;

  $(". " + contentName).each(function(){
    var row = $(this).find("." + rowName);

    row.each(function(){
      var maxHeight = 0;

      var items = $(this).find("." + itemName);

      items.each(function(){
        var mHeight = $(this).css("height");

        if(parseInt(mHeight, 10) > maxHeight){
          maxHeight = mHeight;
        }
      });

      items.each(function(){
        $(this).css("height", maxHeight);
      });
    });
  });

  alignRowHeight("ct-js-testimonial", "ct-js-testimonial-row", "ct-testimonial-item", 1200);
}

```

Slick Tab

For make slick Tab use this markup:



BUAKAW P.P.



ANTOHNY B.



FABRICIO D.S.



LAURA J.



FLOYD G.



FABRICIO DA SILVA

Brazilian Jui-Jitsu

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper.

STATS

SPECIALTY: KICK BOXING, FIT BOXING

AGE: 19

WEIGHT: 62KG

HEIGHT: 175CM

WINS / LOSS / DRAWS: 9 / 0 / 0

ABILITIES

- STAND:
- GROUND:
- CLINCH:
- STAMINA:
- STRENGTH:
- SPEED:

ARCHIEVEMENTS

MMA Instructor Master

Black Belt MMA

1.st Ong Bak Tournamant 2014

2nd Black Belt Brazilian Jui Jitsu

Black Belt Muay Thai Boxing



```

<div class="ct-js-sliderTab">
  <div class="ct-sliderTab-slider">
    <div class="container">
      <section class="ct-js-slick ct-slickTab ct-js-slickTab ct-slick ct-slick-arrow
--type3" data-centerMode="true" data-centerPadding="0" data-swipeToSlide="true" data-auto
play="false" data-arrows="true" data-dots="false" data-items="1" data-SMitems="3" data-MDi
tems="4" data-LGitems="5" data-height="355">

        <div class="item" data-for="floyd">
          <div class="item-inner">
            <figure>
              
            </figure>

            <div class="ct-item-footer">
              <div>
                <p><span data-content="FLOYD G.">FLOYD G.</span></p>
              </div>
            </div>
          </div>
        </div>

      </section>
    </div>

  </div>

  <div class="ct-js-sliderTab-content ct-sliderTab-content">
    <div class="container">

      <div class="targetItem floyd">

        [item content]

      </div>
    </div>
  </div>

```

SCRIPT for slick Tab:

```

$(".ct-js-sliderTab").each(function(){

    var $con = $(this);
    var $slider = $con.find(".ct-sliderTab-slider").first();
    var $items = $slider.find(".item");

    var $container = $con.find(".ct-js-sliderTab-content").first();
    var $targetItems = $container.find(".targetItem");

    $con.on("click", function(e){

        var $target = $(e.target);

        if($target.is("img") || $target.is("p") || $target.is("i") || $target.is(".ct-sl
iderTab-join") || $target.is("span")){
            var $item = $target.closest(".item");
            var $for = $item.attr("data-for");
            var $allItem = $con.find(".item");

            $allItem.each(function(){
                var $this = $(this);

                if($this.attr("data-for") !== $for){
                    $this.removeClass("active");
                }else{
                    $this.addClass("active");

                    var data = {
                        target: $for
                    };
                    $con.trigger('slickTabActiveChange', data);
                }
            });
        }
    });

    $con.on('afterChange', function(event, slick, currentSlide, nextSlide){
        var $slickList = $con.find(".item");
        var $for = null;
        $slickList.each(function(){
            var $this = $(this);

            if(!$this.hasClass("slick-center")){
                $this.removeClass("active");
            }
        });
    });
});

```

```

        }else{
            $for = $this.attr("data-for");
            $this.addClass("active");

            var data = {
                target: $for
            };
            $con.trigger('slickTabActiveChange', data);
        }
    });

});

$con.bind('slickTabActiveChange', function (e, data) {

    $targetItems.each(function(){
        var $this = $(this);

        if($this.hasClass(data.target)){
            $this.addClass("active");
        }else{
            $this.removeClass("active");
        }
    });
});
});
});

```

Calendar

For make calendar use this markup:

SUN	MON	TUE	WED	THU	FRI	SAT
1 All Day Event	2	3	4	5	6	7 Long Event
8 Long Event	9 4p Repeating Event	10	11 Conference	12 10:30a Meeting +4 more	13 7a Birthday Party	14
15 4p Repeating Event	16	17	18	19	20	21
22	23	24	25	26	27	28 Click for Google
1	2	3	4	5	6	7
8	9	10	11	12	13	14

```
<div id='calendar'></div>
```

SCRIPT for calendar:


```
if($('#calendar').length){
    $('#calendar').fullCalendar({
        header: {
            left: 'prev,next today',
            center: 'title',
            right: 'month,basicWeek,basicDay'
        },
        defaultDate: '2015-02-12',
        editable: true,
        eventLimit: true, // allow "more" link when too many events
        events: [
            {
                title: 'All Day Event',
                start: '2015-02-01'
            },
            {
                title: 'Long Event',
                start: '2015-02-07',
                end: '2015-02-10'
            },
            {
                id: 999,
                title: 'Repeating Event',
                start: '2015-02-09T16:00:00'
            },
            {
                id: 999,
                title: 'Repeating Event',
                start: '2015-02-16T16:00:00'
            },
            {
                title: 'Conference',
                start: '2015-02-11',
                end: '2015-02-13'
            },
            {
                title: 'Meeting',
                start: '2015-02-12T10:30:00',
                end: '2015-02-12T12:30:00'
            },
            {
                title: 'Lunch',
                start: '2015-02-12T12:00:00'
            },
            {
                title: 'Meeting',
```

```
        start: '2015-02-12T14:30:00'
    },
    {
        title: 'Happy Hour',
        start: '2015-02-12T17:30:00'
    },
    {
        title: 'Dinner',
        start: '2015-02-12T20:00:00'
    },
    {
        title: 'Birthday Party',
        start: '2015-02-13T07:00:00'
    },
    {
        title: 'Click for Google',
        url: 'http://google.com/',
        start: '2015-02-28'
    }
    ]
});
}
```

Pricing Tables

For make pricing tables use this markup:



YELLOW BELT
CASUAL VISIT

\$25 / EACH

Pellentesque habitant morbi
tristique senectus et netus et
malesuada fames ac turpis

- ✓ FIFO - FLY IN / FLY OUT
- ✓ NO CONTRACT

CHOOSE



BLACK BELT
THE ULTIMATE CHOISE

\$99 / MONTH

Pellentesque habitant morbi tristique
senectus et netus et malesuada
fames ac turpis egestas Vestibulum.

- ✓ MEMBERSHIP
- ✓ UNLIMITED TRAINING
- ✓ ACCES TO ALL CLASSES
- ✓ SHIRT & PANTS
- ✓ GLOVES & FIGHTGEAR

CHOOSE



GYM ONLY
ACCESS TO THE GYM

\$12 / MONTH

Pellentesque habitant morbi
tristique senectus et netus et
malesuada fames ac turpis

- ✓ FIFO - FLY IN / FLY OUT
- ✓ TRAIN 24HRS/DAY
- ✓ 1 ISOTONIC DRINK FREE

CHOOSE

```

<article class="ct-pricingTable animated" data-fx="fadeInLeft" data-time='400'>
  <div class="ct-pricingTable-image">
    
  </div>

  <h3 class="ct-pricingTables-header"><span>Yellow Belt</span>
    <small><span>Casual visit</span></small>
  </h3>

  <div class="ct-pricingTable-price">
    <span>$25<span>/ each</span></span>
  </div>

  <p class="ct-pricingTable-text">
    Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turp
is
  </p>

  <ul class="ct-pricingTable-list">
    <li>
      Fifo - Fly in / fly out
    </li>
    <li>
      no contract
    </li>
  </ul>

  <div class="text-center ct-u-marginTop80">
    <a href="#" class="btn ct-btn--o btn-default"><span>choose</span></a>
  </div>

</article>

```

Gallery

For make Gallery use this markup. You can change number columns by adding this class to **.ct-portfolio** element:

- ct-portfolio--col2
- ct-portfolio--col3
- ct-portfolio--col4



```
<div class="container">
  <div class="ct-portfolio-filters">
    <ul class="ct-portfolio-filters-list list-unstyled list-inline">
      <li>
        <a href="#" class="ct-portfolio-filtersButton active" data-filter="*"><span data-content="all">all</span></a>
      </li>
      <li>
        <a href="#" class="ct-portfolio-filtersButton" data-filter=".facility"><span data-content="facility">facility</span></a>
      </li>
      <li>
        <a href="#" class="ct-portfolio-filtersButton" data-filter=".dojo"><span data-content="dojo">dojo</span></a>
      </li>
      <li>
        <a href="#" class="ct-portfolio-filtersButton " data-filter=".cage"><span data-content="cage">cage</span></a>
      </li>
      <li>
        <a href="#" class="ct-portfolio-filtersButton" data-filter=".gym"><span data-content="gym">gym</span></a>
      </li>
    </ul>
  </div>
</div>
```

```
<div class="container-fluid">
  <div class="ct-portfolio lightGallery ct-portfolio--col4 ct-portfolio-container">
    <article class="ct-portfolio-item gym" data-src="assets/images/demo-content/portfolioImg01.png">
      [item content]
    </article>
    <article class="ct-portfolio-item facility" data-src="assets/images/demo-content/portfolioImg02.png">
      [item content]
    </article>
  </div>
</div>
```

</div>

SCRIPT for gallery:

```
<script src="assets/js/portfolio/jquery.isotope.min.js"></script>  
<script src="assets/js/portfolio/infinitemscroll.min.js"></script>  
<script src="assets/js/portfolio/imagesloaded.js"></script>  
<script src="assets/js/portfolio/init.js"></script>
```

Person Box

For make Person Box use this markup:

- type 1
- type 2

Type 1:



```
<article class="ct-personBox ct-personBox--type1">
  <a href="#">
    <figure>
      
    </figure>

    <div class="ct-personBox-header">
      <h6>
        <span>Fabricio D.S.</span>
        <small>
          <span>Brazilian Jui-Jitsu</span>
        </small>
      </h6>
    </div>
  </a>

  <div class="ct-personBox-body">
    <ul class="socialicons">
      <li>
        <a href="https://www.facebook.com/createITpl" data-toggle="tooltip" data-p
lacement="bottom" title data-original-title="Facebook">
          <i class="fa fa-facebook"></i>
        </a>
      </li>

      <li>
        <a href="https://twitter.com/createitpl" data-toggle="tooltip" data-placem
ent="bottom" title="" data-original-title="Twitter">
          <i class="fa fa-twitter"></i>
        </a>
      </li>

      <li>
        <a href="#" data-toggle="tooltip" data-placement="bottom" title data-origi
nal-title="LinkedIn">
          <i class="fa fa-linkedin"></i>
        </a>
      </li>


      <li>
        <a href="#" data-toggle="tooltip" data-placement="bottom" title data-origi
nal-title="RSS">
          <i class="fa fa-rss"></i>
        </a>
      </li>

      <li>
        <a href="#" data-toggle="tooltip" data-placement="bottom" title data-origi
nal-title="Vimeo">
          <i class="fa fa-vimeo-square"></i>
        </a>
      </li>
    </ul>
  </div>
</article>
```



```
        </a>
      </li>
    </ul>
  </div>
</article>
```

Type 2:



**MIXED MARTIAL
ARTS (MMA)**

SHOW

```

<article class="ct-personBox ct-js-personBox ct-personBox--type2">
  <svg viewBox="0 0 100 20" preserveAspectRatio="none">
    <path d="M0 0 L0 100 L100 100 L100 0 Z" />
  </svg>

  <div class="ct-personBox-inner">
    <figure>
      
    </figure>

    <div class="ct-personBox-header">
      <h6>
        <span>MIXED MARTIAL ARTS <span>(MMA)</span></span></h6>
      </div>

      <div class="ct-personBox-body">
        <p class="ct-personBox-text ct-u-marginBottom90">
          Pellentesque habitant morbi tristique senectus et netus et malesuada fames
ac turpis egestas.
        </p>

        <div class="text-center">
          <a href="#" class="btn btn-block ct-btn--o btn-default"><span>Learn More</
span></a>
        </div>
      </div>
      <div class="text-center ct-personBox-showBtn">
        <a href="#" class="btn btn-block ct-btn--o btn-default ct-js-btn"><span>Show</
span></a>
      </div>
    </div>
  </article>

```

SCRIPT for type 2:

```

jQuery(".ct-js-personBox").each(function(){
    var $this      = $(this),
        $button    = $this.find(".ct-js-btn");


    $button.on("click", function(e){
        e.preventDefault();
        jQuery(".ct-js-personBox").each(function(){
            $(this).removeClass("active");
        });

        $this.addClass("active");
        $this.find(".ct-personBox-body");
        return false;
    });
});

```

Map

For make Map use this markup:

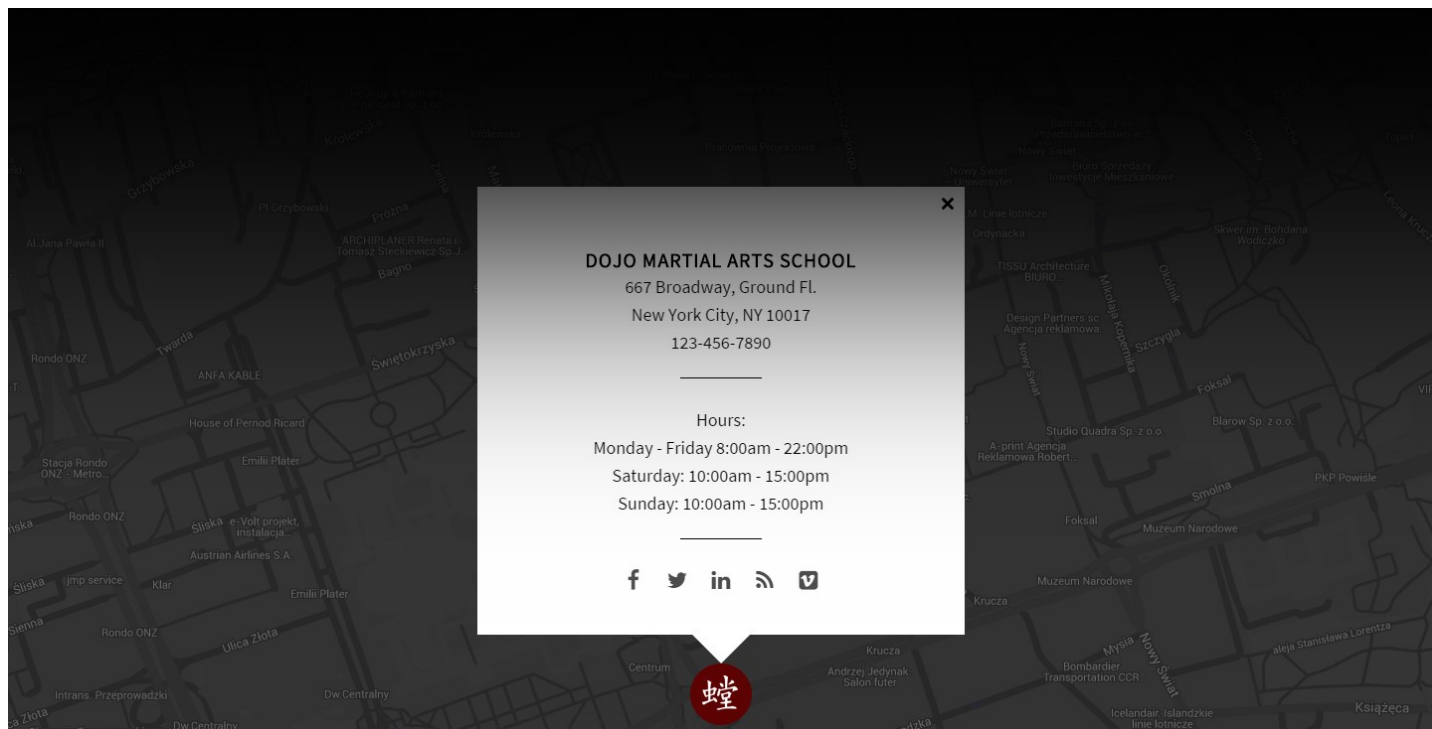


```
<div class="ct-map" data-height="960"></div>
```

SCRIPT for map:

```
<script src="assets/js/map/infobubble-compiled.js"></script>
<script src="assets/js/map/markerclusterer.js"></script>
<script src="assets/js/map/shop-locator.js"></script>
```

Accordion

For make Accordion use this markup:

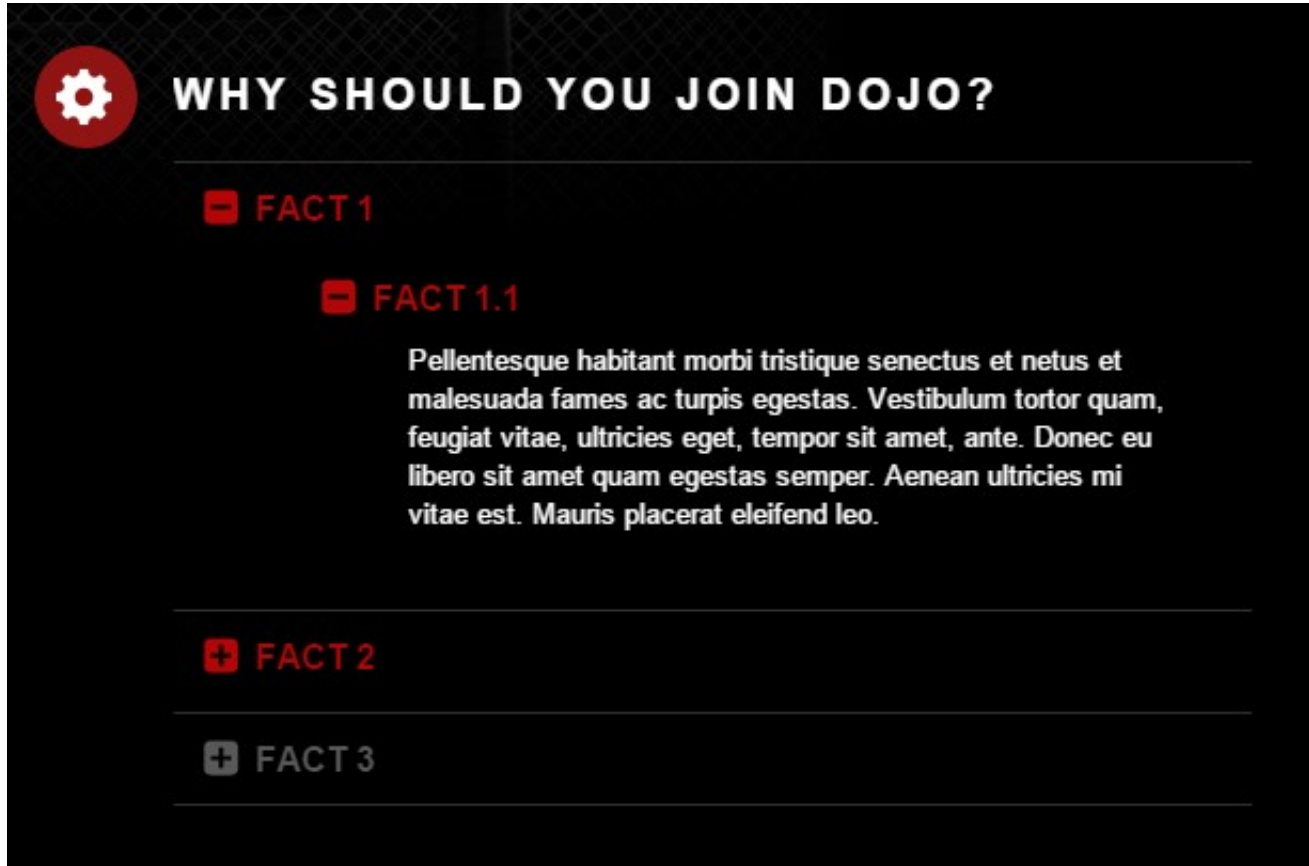

The screenshot shows a dark-themed accordion interface. At the top left is a red gear icon. To its right is the title "WHY SHOULD YOU JOIN DOJO?" in white. Below the title is a horizontal line. The first accordion item is titled "FACT 1" with a red minus sign icon. It is expanded, showing a sub-item "FACT 1.1" with a red minus sign icon. The content of "FACT 1.1" is a block of Latin text: "Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper. Aenean ultricies mi vitae est. Mauris placerat eleifend leo." Below this is another horizontal line. The second accordion item is titled "FACT 2" with a red plus sign icon. The third accordion item is titled "FACT 3" with a grey plus sign icon.

```
<div class="panel-group" id="accordion" role="tablist" aria-multiselectable="true">
  <div class="panel panel-default">
    <div class="panel-heading" role="tab" id="headingOne">
      <h4 class="panel-title">
        <a role="button" data-toggle="collapse" data-parent="#accordion" href="#collapseOne" aria-expanded="true" aria-controls="collapseOne">
          Fact 1
        </a>
      </h4>
    </div>
    <div id="collapseOne" class="panel-collapse collapse in" role="tabpanel" aria-labelledby="headingOne">
      <div class="panel-body">

        <div class="panel-group" id="subAccordion" role="tablist" aria-multiselectable="true">
          <div class="panel panel-default">
            <div class="panel-heading" role="tab" id="subHeadingOne">
              <h4 class="panel-title">
                <a class="" role="button" data-toggle="collapse" data-parent="#subAccordion" href="#subCollapseOne" aria-expanded="false" aria-controls="collapseOne">

                  Fact 1.1
                </a>
              </h4>
            </div>
            <div id="subCollapseOne" class="panel-collapse collapse in" role="tabpanel" aria-labelledby="subHeadingOne">
              <div class="panel-body">

                [content inner1]

              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
  <div class="panel panel-default">
    <div class="panel-heading" role="tab" id="headingTwo">
      <h4 class="panel-title">
        <a class="collapsed" role="button" data-toggle="collapse" data-parent="#accordion" href="#collapseTwo" aria-expanded="false" aria-controls="collapseTwo">
          Fact 2
        </a>
      </h4>
```

```
</div>
<div id="collapseTwo" class="panel-collapse collapse" role="tabpanel" aria-labelledby="headingTwo">
  <div class="panel-body">
    <div class="panel-group" id="subAccordionb" role="tablist" aria-multiselectable="true">
      <div class="panel panel-default">
        <div class="panel-heading" role="tab" id="subHeadingOneb">
          <h4 class="panel-title">
            <a class="collapsed" role="button" data-toggle="collapse" data-parent="#subAccordionb" href="#subCollapseOneb" aria-expanded="false" aria-controls="collapseOne">
              Fact 2.1
            </a>
          </h4>
        </div>
        <div id="subCollapseOneb" class="panel-collapse collapse" role="tabpanel" aria-labelledby="subHeadingOneb">
          <div class="panel-body">
            [content inner1]
          </div>
        </div>
      </div>
      <div id="subCollapseOnebb" class="panel-collapse collapse" role="tabpanel" aria-labelledby="subHeadingOnebb">
          <div class="panel-body">
            [content inner2]
          </div>
        </div>
    </div>
  </div>
</div>
```

```
        </div>
    </div>
</div>

<div class="panel panel-default">
    <div class="panel-heading" role="tab" id="headingThree">
        <h4 class="panel-title">
            <a class="collapsed" role="button" data-toggle="collapse" data-parent="#ac
cordion" href="#collapseThree" aria-expanded="false" aria-controls="collapseThree">
                Fact 3
            </a>
        </h4>
    </div>
    <div id="collapseThree" class="panel-collapse collapse" role="tabpanel" aria-label
ledby="headingThree">
        <div class="panel-body">

            [content]

        </div>
    </div>
</div>
</div>
```

Timeline

For make Timeline use this markup:



WHY SHOULD YOU JOIN DOJO?

FACT 1

FACT 1.1

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper. Aenean ultricies mi vitae est. Mauris placerat eleifend leo.

FACT 2

FACT 3

```

<section id="timeline" class="ct-u-paddingBottom200 section">
  <div class="container ct-u-marginBottom60">

    <div class="text-center ct-u-marginTop150 ct-u-marginBottom50">
      
    </div>

    <h3 class="ct-fw-600 ct-u-colorWhite text-uppercase text-center ct-ls-2 ct-u-marginBottom40 animated" data-fx="bounceInUp">A Long Story Short</h3>

    <p class="text-center ct-u-colorWhite">
      Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac
      turpis egestas. Vestibulum tortor quam, feugiat vitae
    </p>

    <p class="text-center ct-u-colorWhite">
      ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas s
      emper. Aenean ultricies mi vitae est. Mauris placerat eleif
    </p>

    <p class="text-center ct-u-colorWhite">
      end leo. Quisque sit amet est et sapien ullamcorper pharetra.
    </p>

  </div>

  <div id="timeline-embed"></div>
</section>

```

SCRIPT for timeline:

```

<script src="assets/js/timeline/js/storyjs-embed.js"></script>
<script src="assets/js/timeline/js/timeline-init.js"></script>


```

Charts

For make Charts use this markup:

- Circle
- Box
- Line
- Polar

Circle

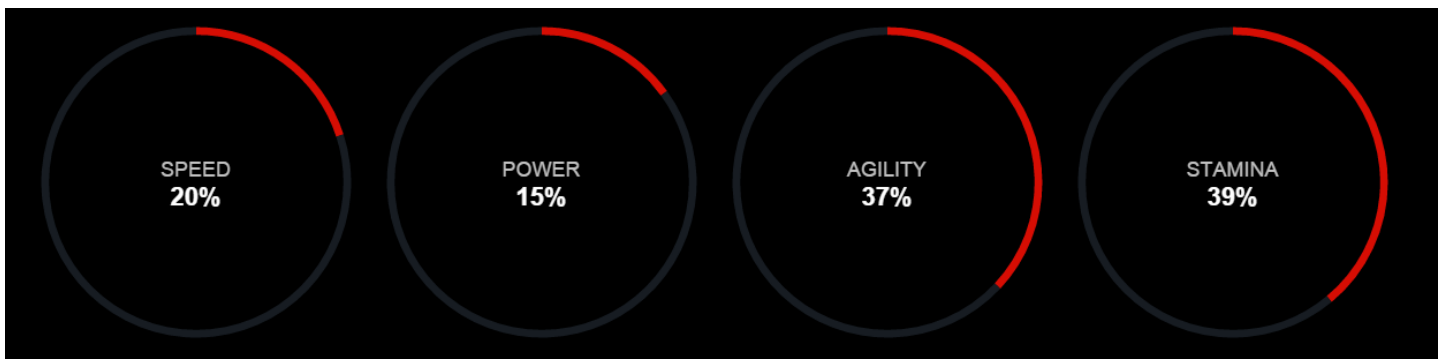

```

<div class="ct-graphBox ct-graphBox--sm">
  <div class="ct-graphBox-graph">
    <canvas width="150" height="150" class="ct-js-pieChart" data-ct-percentage="20"
      data-ct-middleSpace="95" data-ct-secondColor="#161c22"
      data-ct-firstColor="#e01515">
    </canvas>

    <div class="ct-graphBox-content">
      <div class="ct-displayTable">
        <div class="ct-displayTable-inner">
          <span>Speed <span>20%</span></span>
        </div>
      </div>
    </div>
  </div>
</div>

```


SCRIPT for Circle charts

```

<script src="assets/js/charts/Chart.min.js"></script>
<script src="assets/js/charts/init.js"></script>

```

Box

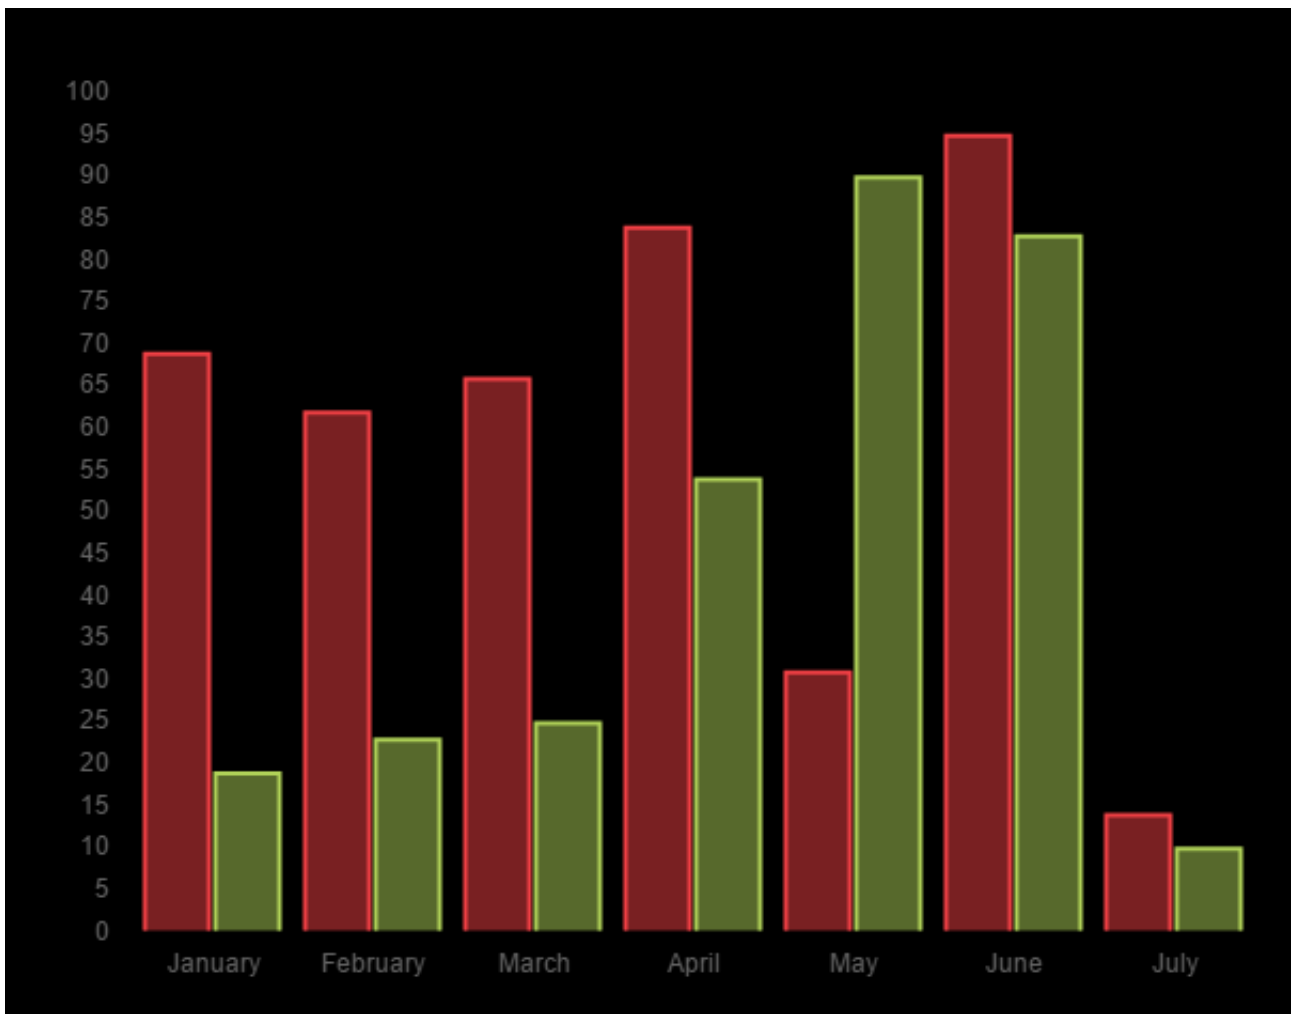

```
<canvas id="barchart" height="450" width="600"></canvas>
```

```
<canvas id="barchart2" height="450" width="600"></canvas>
```

SCRIPT for Box charts

```
<script src="assets/js/charts/Chart.min.js"></script>
<script src="assets/js/charts/init.js"></script>

var randomScalingFactor = function () {
    return Math.round(Math.random() * 100)
};

var barChartData = {
    labels: ["January", "February", "March", "April", "May", "June", "July"],
    datasets: [
        {
            fillColor: "rgba(252,67,73,0.5)",
            strokeColor: "#fc4349",
            highlightFill: "#fc4349",
            highlightStroke: "#fc4349",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        },
        {
            fillColor: "rgba(173,210,96,0.5)",
            strokeColor: "#add260",
            highlightFill: "#add260",
            highlightStroke: "#add260",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        }
    ]
}

var barChartData2 = {
    labels: ["Steam", "Origin", "uPlay", "Desura", "Battle.net"],
    datasets: [
        {
            fillColor: "rgba(252,67,73,0.5)",
            strokeColor: "#fc4349",
            highlightFill: "#fc4349",
            highlightStroke: "#fc4349",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        },
        {
            fillColor: "rgba(173,210,96,0.5)",
            strokeColor: "#add260",
            highlightFill: "#add260",
            highlightStroke: "#add260",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        }
    ]
}
```


```
}

window.onload = function () {

    "use strict";

    var ctx1 = document.getElementById("barchart").getContext("2d");
    window.myBar = new Chart(ctx1).Bar(barChartData, {
        responsive: true
    });
    var ctx4 = document.getElementById("barchart2").getContext("2d");
    window.myBar = new Chart(ctx4).Bar(barChartData2, {
        responsive: true
    });
}
```

Line

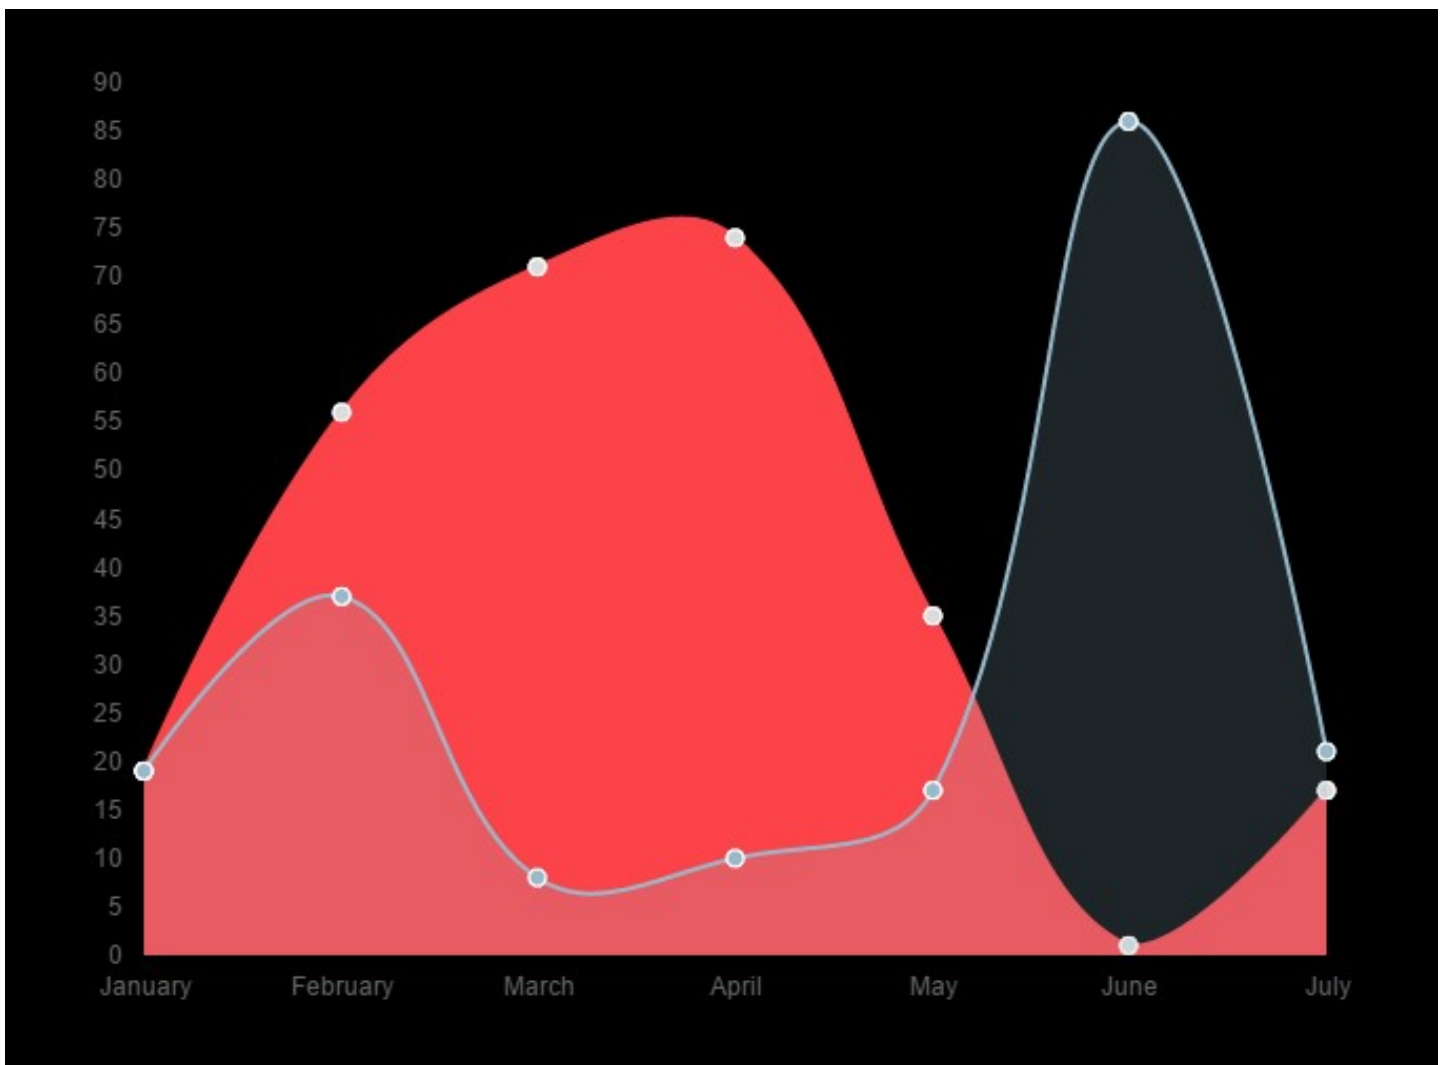

```
<canvas id="linechart" class="line" height="450" width="600"></canvas>
```

SCRIPT for Line charts

```

<script src="assets/js/charts/Chart.min.js"></script>
<script src="assets/js/charts/init.js"></script>

var randomScalingFactor = function () {
    return Math.round(Math.random() * 100)
};

var lineChartData = {
    labels: ["January", "February", "March", "April", "May", "June", "July"],
    datasets: [
        {
            label: "My First dataset",
            fillColor: "#fc4349",
            strokeColor: "#fc4349",
            highlightFill: "#fc4349",
            highlightStroke: "#fc4349",
            pointColor: "rgba(220,220,220,1)",
            pointStrokeColor: "#fff",
            pointHighlightFill: "#fff",
            pointHighlightStroke: "rgba(220,220,220,1)",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor
(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        },
        {
            label: "My Second dataset",
            fillColor: "rgba(151,187,205,0.2)",
            strokeColor: "rgba(151,187,205,1)",
            pointColor: "rgba(151,187,205,1)",
            pointStrokeColor: "#fff",
            pointHighlightFill: "#fff",
            pointHighlightStroke: "rgba(151,187,205,1)",
            data: [randomScalingFactor(), randomScalingFactor(), randomScalingFactor
(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor(), randomScalingFactor()]
        }
    ]
}

window.onload = function () {


    "use strict";

    var ctx2 = document.getElementById("linechart").getContext("2d");
    window.myLine = new Chart(ctx2).Line(lineChartData, {
        responsive: true
    });
}

```

}

polar

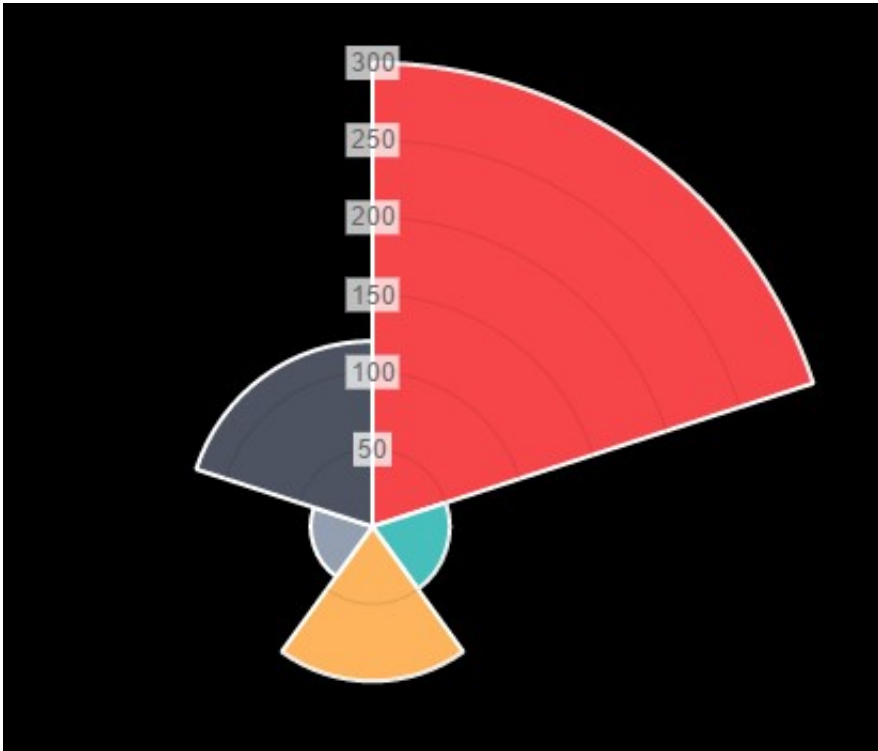

```
<canvas id="polararea" height="450" width="600"></canvas>
```

SCRIPT for Polar charts


```
<script src="assets/js/charts/Chart.min.js"></script>
```

```
<script src="assets/js/charts/init.js"></script>
```

```
var randomScalingFactor = function () {  
    return Math.round(Math.random() * 100)  
};
```

```
var polarData = [  
    {  
        value: 300,  
        color: "#F7464A",  
        highlight: "#FF5A5E",  
        label: "Red"  
    },  
    {  
        value: 50,  
        color: "#46BFBD",  
        highlight: "#5AD3D1",  
        label: "Green"  
    },  
    {  
        value: 100,  
        color: "#FDB46C",  
        highlight: "#FFC870",  
        label: "Yellow"  
    },  
    {  
        value: 40,  
        color: "#949FB1",  
        highlight: "#A8B3C5",  
        label: "Grey"  
    },  
    {  
        value: 120,  
        color: "#4D5360",  
        highlight: "#616774",  
        label: "Dark Grey"  
    }  
];
```

```
window.onload = function () {
```

```
    "use strict";
```

```
    var ctx3 = document.getElementById("polararea").getContext("2d");  
    window.myPolarArea = new Chart(ctx3).PolarArea(polarData, {
```

```

        responsive: true
    });
}


```

Counters

For make Counters use this markup:

- Simple Counter
- Coming Soon

Simple Counter

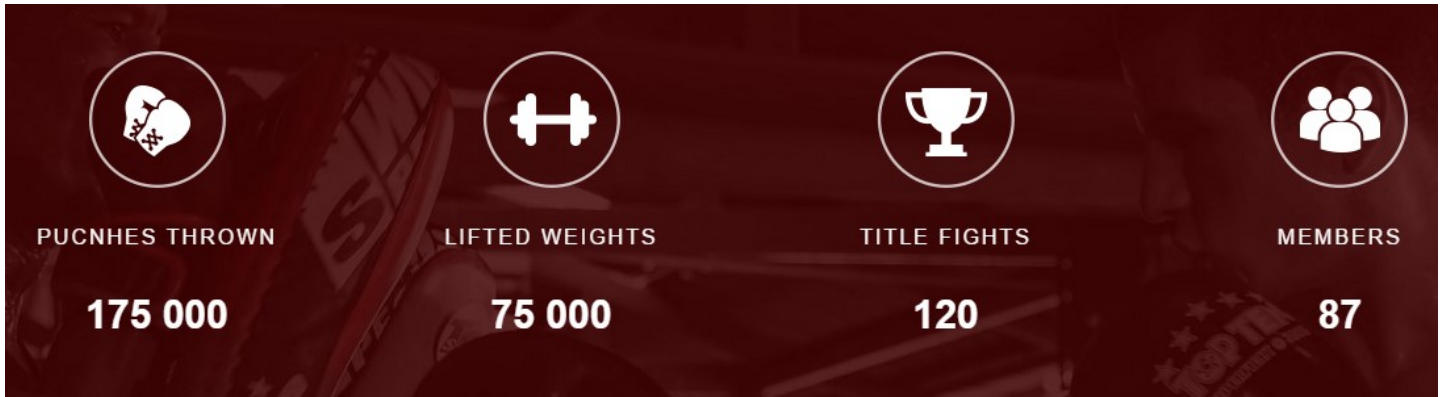

```

<div class="ct-counter ct-counter--type1">
  <div class="text-center ct-u-marginBottom30">
    
  </div>

  <div class="ct-counter-text">
    <h6><span>Pucnhes Thrown</span></h6>
  </div>

  <span class="ct-counter-number ct-js-counter" data-ct-to="175000" data-ct-speed="150
0">
    0
  </span>
</div>

```

SCRIPT for Simple Counter:

```
<script src="assets/js/counter/jquery.countTo.js"></script>
<script src="assets/js/counter/init.js"></script>
```

Coming Soon Counter



```
<div id="counter"></div>
```

SCRIPT for Coming Soon Counter:

```
<script src="assets/js/counter/jquery.mb-comingsoon.min.js"></script>

<script type="text/javascript">
    $('#counter').mbComingsoon({expiryDate: new Date(2015, 8, 14, 0, 0), speed: 950});
</script>
```

Icon Box

For make Icon Box use this markup:



MIXED MARTIAL ARTS (MMA)

Pellentesque habitant morbi
tristique senectus et netus et.

[READ MORE](#)

```
<article class="ct-iconBox">
  <div class="ct-iconBox-media">
    <figure>
      
    </figure>
  </div>

  <div class="ct-iconBox-header">
    <h5><span>Boxing</span></h5>
  </div>

  <div class="ct-iconBox-text">
    <p>
      Pellentesque habitant morbi tristique senectus et netus et.
    </p>
  </div>

  <div class="text-center">
    <a href="#" class="btn ct-btn--s btn-default"><span>Read More</span></a>
  </div>
</article>
```

Media Section

For make Media Section use this markup:

- Parallax
- Ken Burn
- Video

Parallax

```
<section class="ct-mediaSection" data-type="parallax" data-height="500" data-background="assets/images/demo-content/callToActionBG.jpg" data-stellar-background-ratio="0.5">

  <div class="ct-mediaSection-inner">

    [content]

  </div>

</section>
```

SCRIPT for Parallax:

```
<script src="assets/js/media-section_v2/js/jquery.stellar.min.js"></script>
<script src="assets/js/media-section_v2/js/media-section.js"></script>
<script src="assets/js/media-section_v2/js/smoothScroll.js"></script>
```

Ken Burn

```
<section class="ct-mediaSection" data-type="kenburns" data-height="500" data-background-mobile="assets/images/demo-content/breadcrumbBG02.jpg">
  <div class="ct-mediaSection-kenburns">
    
  </div>

  <div class="ct-mediaSection-inner">
    <div class="container">

      [content]

    </div>
  </div>
</section>
```

SCRIPT for Ken Burn:

```
<script src="assets/js/media-section_v2/js/media-section.js"></script>
```

Video


```
<div class="ct-mediaSection" data-color="#fff" data-height="500" data-type="video" data-background-mobile="http://lorempixel.com/1920/1080/abstract">  
  <div class="ct-mediaSection-video">  
    <video muted loop autoplay="autoplay" preload="auto">  
      <source src='assets/videos/maserati.mp4' type='video/mp4'/>  
      <source src='assets/videos/maserati.webm' type='video/webm'/>  
    </video>  
  </div>  
  <div class="ct-mediaSection-inner text-center">  
  
    [content]  
  
  </div>  
</div>
```

SCRIPT for Video:

```
<script src="assets/js/media-section_v2/js/media-section.js"></script>
```

Progress Bar

For make Progress Bar use this markup:

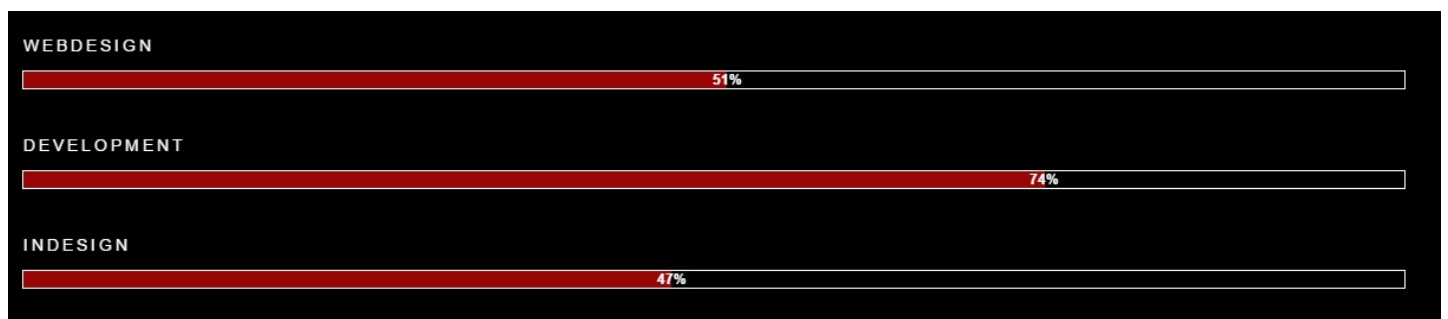

```
<div class="ct-progressBar">

  <div class="ct-progressBar-content">

    <div class="progress">
      <div class="progress-bar animating" role="progressbar" data-percentage="51" aria-valuenow="90" aria-valuemin="0" aria-valuemax="100">
        <span>WebDesign</span>
        <div class="ct-progressBar-percent">
          <span>51%</span>
        </div>
      </div>
    </div>
  </div>
</div>
```

SCRIPT for progress bar:

```

if (jQuery().appear && jQuery("body").hasClass("cssAnimate")) {
  jQuery('.progress').appear(function () {
    var $this = jQuery(this);
    $this.each(function () {
      var $innerbar = $this.find(".progress-bar");
      var percentage = $innerbar.attr("data-percentage");
      $innerbar.addClass("animating").css("width", percentage + "%");

      $innerbar.on('transitionend webkitTransitionEnd oTransitionEnd otransitionend
MSTransitionEnd', function () {
        $innerbar.find(".pull-right").fadeIn(900);
      });

    });
  }, {accY: -100});
} else {
  jQuery('.progress').each(function () {
    var $this = jQuery(this);
    var $innerbar = $this.find(".progress-bar");
    var percentage = $innerbar.attr("data-percentage");
    $innerbar.addClass("animating").css("width", percentage + "%");


    $innerbar.on('transitionend webkitTransitionEnd oTransitionEnd otransitionend MSTr
ansitionEnd', function () {
      $innerbar.find(".pull-right").fadeIn(900);
    });

  });
}

```

Progress icon

For make Progress Icon use this markup:

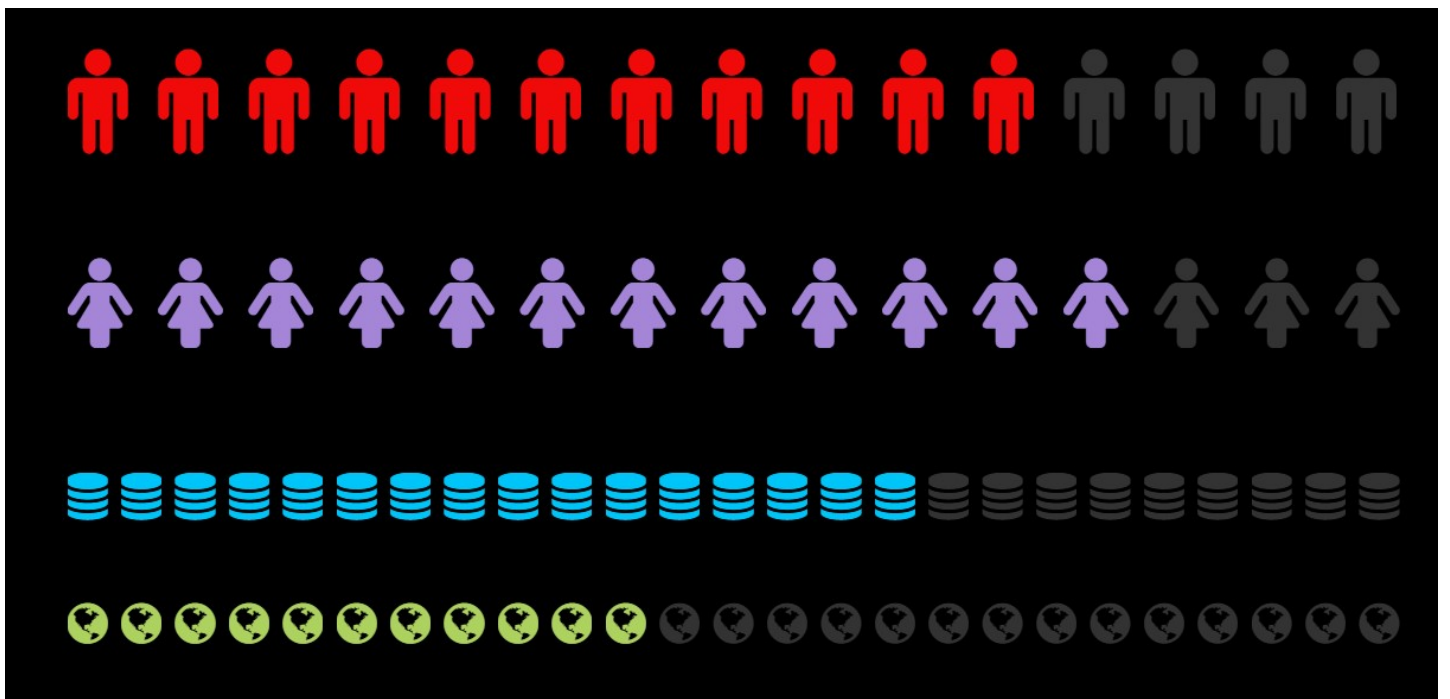

```

<section class="ct-u-marginBottom40">
  <div class="container">
    <div class="ct-u-paddingBottom50">
      <div class="progress-icons" data-font-size="90" data-icon-color="#F00A0A" data-
-active="11" data-total="15"
        data-icon="fa-male" data-delay="200">
      </div>
    </div>
    <div class="ct-u-paddingBottom80">
      <div class="progress-icons" data-font-size="77" data-icon-color="#a485d8" data-
-active="12" data-total="15"
        data-icon="fa-female" data-delay="250"></div>
    </div>

    <div class="ct-u-paddingBottom50">
      <div class="progress-icons" data-font-size="40" data-icon-color="#00c5f9" data-
-active="18" data-total="25"
        data-icon="fa-database" data-delay="200"></div>
    </div>
    <div class="ct-u-paddingBottom80">
      <div class="progress-icons" data-font-size="40" data-icon-color="#add260" data-
-active="11" data-total="25"
        data-icon="fa-globe" data-delay="200"></div>
    </div>
  </div>
</section>

```

SCRIPT for progress icon:

```
<script src="assets/js/progressicons/init.js"></script>
```

Sliders

For make Slider use this markup. you can add arrow class to **.ct-slick** element:

- ct-slick-arrow--type1
- ct-slick-arrow--type2
- ct-slick-arrow--type3
- ct-slick-arrow--type4
- ct-slick-arrow--type5

```
<section class="ct-js-slick ct-slick ct-slick-arrow--type4" data-height="156" data-centerP  
adding="50" data-centerMode="true" data-autoplay="false" data-arrows="true" data-dots="fal  
se" data-items="1" data-SMItems="3">  
  <div class="item">  
    <div class="item-inner">  
  
      [content]  
  
    </div>  
  </div>  
  <div class="item">  
    <div class="item-inner">  
  
      [content]  
  
    </div>  
  </div>  
</section>
```

SCRIPT for Sliders:

```
<script src="assets/js/slick/slick.min.js"></script>  
<script src="assets/js/slick/init.js"></script>
```

Light Gallery

For make Slider use this markup. you can add arrow class to **.ct-slick** element:

```

<div class="lightGallery">
  <article data-src="assets/images/demo-content/portfolioImg01.png">
    <div class="ct-gallery-outer">
      <div class="ct-gallery-media">
        <figure>
          
          <figcaption>

              [content]

          </figcaption>
        </figure>
      </div>
    </div>
  </article>

  <article data-src="assets/images/demo-content/portfolioImg01.png">
    <div class="ct-gallery-outer">
      <div class="ct-gallery-media">
        <figure>
          
          <figcaption>

              [content]

          </figcaption>
        </figure>
      </div>
    </div>
  </article>
</div>

```

SCRIPT for light Gallery:

```
<script src="assets/js/light-gallery/js/lightGallery.min.js"></script>
```

Light Gallery

For make Light Gallery use this markup:

```

<div class="lightGallery">
  <article data-src="assets/images/demo-content/portfolioImg01.png">
    <div class="ct-gallery-outer">
      <div class="ct-gallery-media">
        <figure>
          
          <figcaption>

              [content]

          </figcaption>
        </figure>
      </div>
    </div>
  </article>

  <article data-src="assets/images/demo-content/portfolioImg01.png">
    <div class="ct-gallery-outer">
      <div class="ct-gallery-media">
        <figure>
          
          <figcaption>

              [content]

          </figcaption>
        </figure>
      </div>
    </div>
  </article>
</div>

```

Buttons

Types of buttons:

- ct-btn--link
- ct-btn--s
- ct-btn--o
- ct-btn--c
- ct-btn--inverse
- ct-btn--simple

```
<a href="#" class="btn btn-motive ct-btn--s btn-block"><span>Button</span></a>
```

Appearing with Animation when element in viewport

Animation can be turn off just be remove "withAnimation" class from body.

Usage:

- add "animated" class to element and data-fx="animation-type". That's it.

Available animation : <http://daneden.github.io/animate.css/> (<http://daneden.github.io/animate.css/>)

- data-fx="hinge"
- data-fx="bounce"
- data-fx="flash"
- data-fx="pulse"
- data-fx="shake"
- data-fx="swing"
- data-fx="tada"
- data-fx="wobble"
- data-fx="bounceIn"
- data-fx="bounceInDown"
- data-fx="bounceInLeft"
- data-fx="bounceInRight"
- data-fx="bounceInUp"
- data-fx="bounceOut"
- data-fx="bounceOutDown"
- data-fx="bounceOutLeft"
- data-fx="bounceOutRight"
- data-fx="bounceOutUp"
- data-fx="fadeIn"
- data-fx="fadeInDown"
- data-fx="fadeInDownBig"
- data-fx="fadeInLeft"
- data-fx="fadeInLeftBig"
- data-fx="fadeInRight"
- data-fx="fadeInRightBig"
- data-fx="fadeInUp"
- data-fx="fadeInUpBig"
- data-fx="fadeOut"
- data-fx="fadeOutDown"
- data-fx="fadeOutDownBig"
- data-fx="fadeOutLeft"
- data-fx="fadeOutLeftBig"
- data-fx="fadeOutRight"
- data-fx="fadeOutRightBig"
- data-fx="fadeOutUp"
- data-fx="fadeOutUpBig"
- data-fx="flip"
- data-fx="flipInX"
- data-fx="flipInY"
- data-fx="flipOutX"
- data-fx="flipOutY"
- data-fx="lightSpeedIn"
- data-fx="lightSpeedOut"
- data-fx="rotateIn"
- data-fx="rotateInDownLeft"

- data-fx="rotateInDownRight"
- data-fx="rotateInUpLeft"
- data-fx="rotateInUpRight"
- data-fx="rotateOut"
- data-fx="rotateOutDownLeft"
- data-fx="rotateOutDownRight"
- data-fx="rotateOutUpLeft"
- data-fx="rotateOutUpRight"
- data-fx="slideInDown"
- data-fx="slideInLeft"
- data-fx="slideInRight"
- data-fx="slideOutLeft"
- data-fx="slideOutRight"
- data-fx="slideOutUp"
- data-fx="rollIn"
- data-fx="rollOut"

Grid System and Single row structure

The default Bootstrap grid system utilizes 12 columns. It's responsive grid and adapts to viewport. Below 767px viewports, the columns become fluid and stack vertically. The fluid grid system uses percents instead of pixels for column widths. Each row always include 12 columns (for example col-md-8 + col-md-4 = col-md-12).

Bootstrap documentation: here (<http://getbootstrap.com/css/#grid>)

Basic grid HTML:

```

1.   <div class="row">
2.     <div class="col-md-1">.col-md-1</div>
3.     <div class="col-md-1">.col-md-1</div>
4.     <div class="col-md-1">.col-md-1</div>
5.     <div class="col-md-1">.col-md-1</div>
6.     <div class="col-md-1">.col-md-1</div>
7.     <div class="col-md-1">.col-md-1</div>
8.     <div class="col-md-1">.col-md-1</div>
9.     <div class="col-md-1">.col-md-1</div>
10.    <div class="col-md-1">.col-md-1</div>
11.    <div class="col-md-1">.col-md-1</div>
12.    <div class="col-md-1">.col-md-1</div>
13.    <div class="col-md-1">.col-md-1</div>
14.  </div>
15.  <div class="row">
16.    <div class="col-md-8">.col-md-8</div>
17.    <div class="col-md-4">.col-md-4</div>
18.  </div>
19.  <div class="row">
20.    <div class="col-md-4">.col-md-4</div>
21.    <div class="col-md-4">.col-md-4</div>
22.    <div class="col-md-4">.col-md-4</div>
23.  </div>
24.  <div class="row">
25.    <div class="col-md-6">.col-md-6</div>
26.    <div class="col-md-6">.col-md-6</div>
27.  </div>

```

JavaScript

All javascripts are placed in folder /js. In main.js file we implement all functions calls.

This theme uses following Javascript files:

1. Bootstrap v 3 framework (powerful front-end framework for faster and easier web development)
2. JQuery v1.11.3 (A fast javascript library that Foodtruckifies how to traverse HTML documents, handle events, perform animations.)
3. Slick carousel
4. Skrollr
5. Device.js
6. Appear.js
7. browser.js
8. jQuery Shop Locator by createIT
9. JQuery.appear
10. Isotope
11. jQuery Stellar
12. Modernizr
13. Snap.js
14. timeline
15. lightGallery
16. FullCalendar
17. charts
18. countTo
19. comingsoon
20. onepager

Full Calendar

Full documentation you can find here (<http://fullcalendar.io/docs/>).

Light Gallery

Full documentation you can find here (<http://sachinchoolur.github.io/lightGallery/index.html>).

jQuery Shop Locator

Full documentation you can find here (<http://createit.support/html-documentation/shoplocator/>).

HTML markup:

```
1. <div class="ct-googleMap ct-js-googleMap"></div>
2.
```

Javascript markup:

```
1.    $(".ct-js-googleMap").ShopLocator({
2.        map: {
3.            center: [40.712784, -74.005941],
4.            zoom: 15,
5.            allMarkersInViewport: false,
6.            scrollwheel: false
7.        },
8.        markersIcon: "assets/images/marker.png",
9.        marker: {
10.            latlng: [40.712784, -74.005941]
11.        }
12.    });
13.
```

Custom search courses with data from json file.

Working example is in navbar.

HTML markup:

```
1.    <!-- Modal -->
2.    <div class="modal ct-js-searchModal fade" id="myModal" tabindex="-1" role="dialog" ar
3.        ia-labelledby="myModalLabel">
4.        <div class="modal-dialog" role="document">
5.            <div class="modal-content">
6.                <div class="modal-header">
7.                    <button type="button" class="close" data-dismiss="modal" aria-label
8.                        ="Close"><span aria-hidden="true"><i class="fa fa-close"></i></span></button>
9.                    <h3 class="modal-title" id="myModalLabel">Search Results</h3>
10.                </div>
11.                <div class="modal-body">
12.                </div>
13.            </div>
14.        </div>
15.    </div>
16.    <!-- Input -->
17.    <input id="search" placeholder="Search ..." required type="text" class="form-cont
18.        rol input-lg ct-searchCourse">
```

Javascript markup:


```

1.     $(".ct-searchCourse").each(function(){
2.         $(this).on("keydown",function search(e) {
3.             if(e.keyCode == 13) {
4.                 $('.ct-js-searchModal').each(function(){
5.                     $(this).modal({
6.                         show: true
7.                     })
8.                 });
9.                 var searchArray = [];
10.                var inputValue = $(this).val();
11.                $('.ct-js-searchModal .modal-body *').remove();
12.                $.ajax({
13.                    url: 'assets/json/search.json',
14.                    success: function(data) {
15.                        for(var i = 0; data.length > i; i++ ){
16.                            var arrayCourseName = data[i].courseName;
17.
18.                            if(arrayCourseName.toLowerCase().indexOf(inputValue.toLowerCase()) != -1){
19.                                searchArray.push(data[i]);
20.                                $('.ct-js-searchModal .modal-body').append(
21.                                    "<div class='ct-productBox ct-productBox--inline ct-u-displayTable ct-u-marginBottom30'>"+
22.                                    "<div class='ct-u-displayTableCell'>"+
23.                                    "<div class='ct-productImage'>"+
24.                                    "<a href='course-sing le.html'>"+
25.                                    "<img src='"+data[i].thumbnailImage+"' alt='Product'>"+
26.                                    "</a>"+
27.                                    "</div>"+
28.                                    "</div>"+
29.                                    "<div class='ct-u-displayTableCell'>"+
30.                                    "<div class='ct-productDescription'>"+
31.                                    "<a href='course-sing le.html'>"+
32.                                    "<h5 class='ct-fw-600 ct-u-marginBottom10'>"+data[i].courseName+"</h5>"+
33.                                    "</a>"+
34.                                    "<span>"+data[i].courseDescription+"</span>"+
35.                                    "</div>"+
36.                                    "<div class='ct-productMeta'>"+
37.                                    "<div class='ct-u-displayTableVertical'>"+
38.                                    "<div class='ct-u-displayTableCell'>"+
39.                                    "<div class='starr'
data-rating='"+data[i].stars+"'></div>"+

```

```

40.                                                                 "</div>"+
41.                                                                 "<div class='ct-u-dis
playTableCell'>"+
42.                                                                 "<span class='ct-u-co
lorMotive'>"+data[i].price+"</span>"+
43.                                                                 "<span class='ct-u-te
xtLineThrough'>290$</span>"+
44.                                                                 "</div>"+
45.                                                                 "<div class='ct-u-dis
playTableCell'>"+
46.                                                                 "<a href='#'>"+
47.                                                                 +data[i].commentsCour
se+" <i class='fa fa-user'></i>"+
48.                                                                 "</a>"+
49.                                                                 "</div>"+
50.                                                                 "</div>"+
51.                                                                 "</div>"+
52.                                                                 "</div>"
53.                                                                 )
54.                                                                 }
55.                                                                 }
56.                                                                 if(searchArray.length == 0){
57.                                                                 $(".ct-js-searchModal .modal-heade
r").hide();
58.                                                                 $(' .ct-js-searchModal .modal-body
*').remove();
59.                                                                 $(' .ct-js-searchModal .modal-body').a
ppend("<h2 class='ct-u-paddingBoth100 text-center'>No results found</h2>")
60.                                                                 }else{
61.                                                                 $(".ct-js-searchModal .modal-heade
r").show();
62.                                                                 $(' .ct-js-searchModal .modal-title').
text("We found "+searchArray.length+" courses.")
63.                                                                 }
64.                                                                 $(".ct-js-searchModal .modal-body .starr
tarr({
65.                                                                 noSet: true
66.                                                                 });
67.                                                                 }
68.                                                                 });
69.                                                                 }
70.                                                                 });
71.
72.                                                                 //Triger keydown event on search button
73.                                                                 var e = jQuery.Event("keydown");
74.                                                                 e.which = 13;
75.                                                                 e.keyCode = 13;
76.                                                                 $(".ct-search-button, .ct-navbar-search-button").on("click", function(){
77.                                                                 $(".ct-searchCourse").trigger(e)
78.                                                                 })
79.

```

Slick corusel

Read the documentation here :

Slick Documentation (<http://kenwheeler.github.io/slick/>)

```
1.     <div class="ct-slick ct-js-slick text-center" data-adaptiveHeight="true" data-a
nimations="true" data-autoplay="true" data-infinite="false" data-autoplaySpeed="6000"
data-draggable="true" data-touchMove="false" data-arrows="false" data-XSitems="4" dat
a-SMitems="8" data-MDitems="12" data-LGitems="12" data-items="1">
2.         <div class="item">
3.             <a href="#"><i class="fa fa-apple"></i></a>
4.         </div>
5.         <div class="item">
6.             <a href="#"><i class="fa fa-yelp"></i></a>
7.         </div>
8.         <div class="item">
9.             <a href="#"><i class="fa fa-behance"></i></a>
10.        </div>
11.        <div class="item">
12.            <a href="#"><i class="fa fa-digg"></i></a>
13.        </div>
14.        <div class="item">
15.            <a href="#"><i class="fa fa-delicious"></i></a>
16.        </div>
17.        <div class="item">
18.            <a href="#"><i class="fa fa-drupal"></i></a>
19.        </div>
20.        <div class="item">
21.            <a href="#"><i class="fa fa-dropbox"></i></a>
22.        </div>
23.        <div class="item">
24.            <a href="#"><i class="fa fa-dribbble"></i></a>
25.        </div>
26.        <div class="item">
27.            <a href="#"><i class="fa fa-foursquare"></i></a>
28.        </div>
29.        <div class="item">
30.            <a href="#"><i class="fa fa-github"></i></a>
31.        </div>
32.        <div class="item">
33.            <a href="#"><i class="fa fa-google-plus"></i></a>
34.        </div>
35.        <div class="item">
36.            <a href="#"><i class="fa fa-linkedin-square"></i></a>
37.        </div>
38.    </div>
39.
```

And js initialization (js/slick/init.js file),
there you can change slider parameters :


```

55.         }, $this.data('time'));
56.     } else {
57.         $this.addClass('activate');
58.         $this.addClass($this.data('fx'));
59.     }
60.     });
61.     }, {accX: 50, accY: -200});
62. }
63.
64. // slider height
65. if ($this.attr('data-height')) {
66.     $this.css({height: $slickheight});
67.     $this.find('.slick-list').css({height: $slickheight});
68.     $this.find('.slick-track').css({height: $slickheight});
69.     $this.find('.item').each(function () {
70.         $(this).css({height: $slickheight})
71.     });
72. }
73.
74.
75. // item height
76. $this.find('.item').each(function () {
77.     var $item = $(this),
78.         $height = $item.attr('data-height');
79.
80.     $item.css({
81.         height: $height
82.     })
83.
84. });
85.
86. // Background Image // -----
87. $this.find(".item").each(function () {
88.     var $slide_item = $(this);
89.     var bg = validatedata($slide_item.attr('data-bg'), false);
90.     if (bg) {
91.         $slide_item.css('background-image', 'url("' + bg + '")');
92.     }
93. });
94.
95. // Items Settings
96. var ctslidesToShow = parseInt(validatedata($this.attr("data-items"), 1), 1
0), // Non Responsive
97.     slidesXS = parseInt(validatedata($this.attr("data-XSitems"), ctslidesToSh
ow), 10),
98.     slidesSM = parseInt(validatedata($this.attr("data-SMitems"), slidesXS), 1
0), // Default Item from data-items;
99.     slidesMD = parseInt(validatedata($this.attr("data-MDitems"), slidesSM), 1
0), // Default Item from smaller Device;
100.    slidesLG = parseInt(validatedata($this.attr("data-LGitems"), slidesMD), 1
0), // Default Item from smaller Device;
101.
102.    ctaccessibility = parseBoolean($this.attr("data-accessibility"), true),
103.    ctadaptiveHeight = parseBoolean($this.attr("data-adaptiveHeight"), fals
e),
104.    ctautoplay = parseBoolean($this.attr("data-autoplay"), false),

```



```

150.         customize the HTML for the "Previous" arrow.
           nextArrow: ctnextArrow,           // Allows you to select a node or cu
151.         customize the HTML for the "Next" arrow.
           centerMode: ctcenterMode,       // Enables centered view with partial
152.         l prev/next slides. Use with odd numbered slidesToShow counts.
           centerPadding: ctcenterPadding,  // Side padding when in center mode
153.         (px or %)
           cssEase: ctcssEase,             // CSS3 Animation Easing
154.         dots: ctdots,                   // Show dot indicators
155.         draggable: ctDraggable,        // Enable mouse dragging
156.         fade: ctfade,                   // Enable fade
157.         focusOnSelect: ctfocusOnSelect, // Enable focus on selected element
158.         (click)
           easing: cteasing,               // Add easing for jQuery animate. Use
159.         e with easing libraries or default easing methods
           edgeFriction: ctedgeFriction,    // Resistance when swiping edges of
160.         non-infinite carousels
           infinite: ctinfinite,           // Infinite loop sliding
161.         initialSlide: ctinitialSlide,   // Slide to start on
162.         lazyLoad: ctlazyLoad,           // Set lazy loading technique. Accepts
163.         ts 'ondemand' or 'progressive'
           mobileFirst: ctmobileFirst,     // Responsive settings use mobile first
164.         rst calculation
           pauseOnHover: ctpauseOnHover,   // Pause Autoplay On Hover
165.         pauseOnDotsHover: ctpauseOnDotsHover, // Pause Autoplay when a dot is hovered
166.         red
           respondTo: ctrespondTo,         // Width that responsive object responds
167.         onds to. Can be 'window', 'slider' or 'min' (the smaller of the two)
           slide: ctslide,                 // Element query to use as slide
168.         slidesToScroll: ctslidesToScroll, // Number of slides to scroll
169.         speed: ctspeed,                  // Slide/Fade animation speed
170.         swipe: ctswipe,                  // Enable swiping
171.         swipeToSlide: ctswipeToSlide,    // Allow users to drag or swipe directly
172.         ctly to a slide irrespective of slidesToScroll
           touchMove: cttouchMove,         // Enable slide motion with touch
173.         touchThreshold: cttouchThreshold, // To advance slides, the user must
174.         swipe a length of (1/touchThreshold) * the width of the slide
           useCSS: ctuseCSS,                // Enable/Disable CSS Transitions
175.         variableWidth: ctvariableWidth,  // Variable width slides
176.         vertical: ctvertical,            // Vertical slide mode
177.         rtl: ctrtl,                       // Change the slider's direction to
178.         become right-to-left
           responsive: [ // Responsive Breakpoints
179.             {
180.                 breakpoint: $widthLG, // Desktop
181.                 settings: {
182.                     slidesToShow: slidesLG
183.                 }
184.             },
185.             {
186.                 breakpoint: $widthMD, // Laptop
187.                 settings: {
188.                     slidesToShow: slidesMD
189.                 }
190.             },
191.             {

```

```

192.             breakpoint: $widthSM, // Tablet
193.             settings: {
194.                 slidesToShow: slidesSM
195.             }
196.         },
197.         {
198.             breakpoint: $widthXS, // Mobile
199.             settings: {
200.                 slidesToShow: slidesXS
201.             }
202.         }
203.     ] // end Responsive Breakpoints
204.
205. }); //end $this.slick
206.
207. $this.on('beforeChange', function () {
208.     if (ctanimations) {
209.         $this.find(".slick-slide [data-fx]").each(function () {
210.             var $content = $(this);
211.             $content.removeClass($content.data('fx')).removeClass("activate");
212.         });
213.         setTimeout(function () {
214.             $this.find(".slick-active [data-fx]").each(function () {
215.                 var $content = $(this);
216.                 if ($content.data('time') !== undefined) {
217.                     setTimeout(function () {
218.                         $content.addClass($content.data('fx')).addClass("activate");
219.                     }, $content.data('time'));
220.                 } else {
221.                     $content.addClass($content.data('fx')).addClass("activate");
222.                 }
223.             });
224.         }, 150);
225.     }
226. });
227.
228. }); // end each functions
229. } // end length if
230. } // end Slick
231. }); // end Doc Ready
232.
233. }(jQuery));
234.

```

jquery.appear

This plugin call function when element appear in viewport. This is used in custom animation, progress bars, counter timer.

Documentation: <https://github.com/bas2k/jquery.appear/> (<https://github.com/bas2k/jquery.appear/>)


```

1.     if ($().appear) {
2.         if (device.mobile() || device.tablet()) {
3.             $body1.removeClass("cssAnimate");
4.         } else {
5.
6.             $('cssAnimate .animated').appear(function () {
7.                 var $this = $(this);
8.
9.                 $this.each(function () {
10.                    if ($this.data('time') != undefined) {
11.                        setTimeout(function () {
12.                            $this.addClass('activate');
13.                            $this.addClass($this.data('fx'));
14.                        }, $this.data('time'));
15.                    } else {
16.                        $this.addClass('activate');
17.                        $this.addClass($this.data('fx'));
18.                    }
19.                });
20.            }, {accX: 50, accY: -350});
21.
22.            // Skrollr // -----
-----
-----
23.
24.            var s = skrollr.init({
25.                forceHeight: false
26.            });
27.        }
28.    }

```

Isotope

An exquisite jQuery plugin for magical layouts

```

1.
2.         (function ($) {
3.     "use strict";
4.
5.     jQuery(document).ready(function () {
6.         if ($().isotope && $('<div class="ct-gallery">').length > 0)) {
7.
8.             var $container = $('<div class="ct-gallery">'), // object that will keep track of opti
ons
9.                 isotopeOptions = {}, // defaults, used if not explicitly set in hash
10.                defaultOptions = {
11.                    filter: '*', itemSelector: '<div class="ct-gallery-item">', // set columnWidth
to a percentage of container width
12.                    masonry: {
13.                        }
14.                };
15.
16.            $container.imagesLoaded().progress(function (instance, image) {
17.                if (!image.isLoaded) {
18.                    return;
19.                }
20.
21.                var p = $(image.img).closest('<div class="hidden">');
22.                p.removeClass('hidden');
23.                $container.addClass('is-loaded');
24.
25.                // set up Isotope
26.                $container.each(function () {
27.                    $(this).isotope(defaultOptions);
28.                });
29.
30.                $container.isotope('layout');
31.            }).always(function (instance) {
32.                if($().infinitemasonry){
33.                    $container.infinitemasonry({
34.                        loading: {
35.                            finished: undefined,
36.                            //img: "data:image/gif;base64,R0lGODlhHgAeAJEDAP///5mZmU1
NTQAAACH/C05FVFNQVBFMi4wAwEAAAah/wtYTVAgRGF0YVhNUdW/eHBhY2tldCBiZWdpbj0i77u/IiBpZD0i
VzVNME1wQ2VoaUh6cmVTek5UY3prYzlkIj8+IDx4OnhtcG1ldGEgeG1sbnM6eD0iYWVrYmU6bnM6bWV0YS8iI
Hg6eG1wdGs9IkFkb2JlIFhNUCBDb3JlIDUuNS1jMDE0IDc5LjE1MTQ4MSwgMjAxMy8wMy8xMy8xMjowOT0xNS
AgICAgICAgIj4gPHJkZjzpSREYgeG1sbnM6cmRmPSJodHRwOi8vd3d3LnczLm9yZy8xOTk5LzAyLzIyLXJkZi1
zew50YXgtbnMjIj4gPHJkZjzpEZXNjcmlwdGlvbiByZGY6YWJvdXQ9IiIgeG1sbnM6eG1wTU09Imh0dHA6Ly9u
cy5hZG9iZS5jb20veGFwLzEuMC9tbS8iIHhtbG5zOnN0UmVmPSJodHRwOi8vbnMuYWRvYmUuY29tL3hhcC8xL
jAvc1R5cGUvUmVzb3V5Y2VSZWYjIiB4bWxuczp4bXA9Imh0dHA6Ly9ucy5hZG9iZS5jb20veGFwLzEuMC8iIH
htcE1NOK9yawdpbmFsRG9jdW1lbnRJRd0ieG1wLmRpdDpkNTZiZnZiZC1lOTVmlTIyNDUtYmNhMS00Y2M2Yjd
lOTNlZmYiIHhtcE1NOKRvY3VtZW50SUQ9InhtcC5kaWQ6QkE1QTAXRUFjNDhBMTFFMkFGNTNBNDUzMDREQkY3
QjUiIHhtcE1NOKluc3RhbmNlSUQ9InhtcC5paWQ6QkE1QTAXRUFjNDhBMTFFMkFGNTNBNDUzMDREQkY3QjUiI
HhtcDpDcmVhdG9yVG9vbD0iQWRvYmUgUGhvdG9zaG9wIENDICxwXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0i
JvbSBzdFJlZjppbnN0Yw5jZU1EPSj4bXAuaWlkOjgwYzkyNDNRjLWJhYTktNGQ0Yy1hYTc2LTk3NjY0MGI5ZjU
wYyIgc3RSZWY6ZG9jdW1lbnRJRd0ieG1wLmRpdDpkNTZiZnZiZC1lOTVmlTIyNDUtYmNhMS00Y2M2Yjd1OTNl
ZmYiLz4gPC9yZGY6RGVzY3JpcHRpb24+IDwvcmlpZj0iXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0iXz0i
nIiPz4B//79/Pv6+fj39vX08/Lx80/u7ezr6uno5+b150Pi4eDf3t3c29rZ2NfW1dTt0tHQz87NmVkyCjHxs
XEw8LBwL++vby7urm4t7a1tL0ysbCvrq2sq6ppqKempaSjoqGgn56dnJuamZiXlpwUk5KRKI+OjYyLiomIh4a
FhIOCGYB/fn18e3p5eHd2dXRzcnFwb25tbGtqaWhnZmVky2JhYf9eXVxbWllyV1ZVVFNSUVBPTk1MS0pJSEdG
RURDQkFAPz49PDs60Tg3NjU0MzIxMC8uLSwrKikoJyY1JCMiISAfHh0cGxoZGBcWFRQTEhEQDw4NDAsKCQgHB

```

```
gUEAwIBAAAh+QQFCgADACwAAAAAHgAeAAACa4Rvo8LN0pxDCMpmr6ANxy9xyaKbk2hi5CUC6b0Ga0y82xyVtA
r1/g8MCoFEOjGATCKNuYtSydQInsmohro0SrEBqXPr1XDDjrFwx0yr1+yg1GZ772BNqQQ+t+Prdp6c3yewF3i
XF4f2J1UAACH5BAUKAAMALAAAAAATABMAAAIzjG+jwM2I1HAOHkmbTSuDHWAeKGZkZ241JbXuC8fy7Ar2bdM4
ru/57PvJgoKez7hD8mYFACH5BAUKAAMALAAAAAAeAAgAAAIr1G+jwc06gJwSIegcpNQenD0KN3nJEgYbCZgCG
K6kC2cyR6PxyOZDquKRCgAh+QQFCgADACwLAAAAEwATAAACM5Rvo8HNIrRwDh5Jm00rhy1gHihmZGduJSW17g
vH8ky7wI3fdJ7vvd77AWVCg0935CVzBQAh+QQFCgADACwWAAAACAAAeAAACHZSPqcvtpaKctMqAs968+w9+1kg
C5omm6sq2b1sAAACH5BAUKAAMALAsAcwATABMAAAI3nI8jy5vf2kuRTVTdNVlsnn1K+HXiiaYTwLbsEcRy7Lrw
LNftjQf6a+jRfjzcD1CchZM5Y1BYAAAh+QQFCgADACwAABYAHgAIAAAACK4Rvo8HNOoScEiHoHKTUHPw9Cjd5y
RIGGymYABiupAtnMkej8cjmQ6rikQoAIFkEBQoAAwAsAAALABMAEwAAAjeEb6PLg9ji07HNVNcFwd+ubKDzje
aJpkrAtuwixHLSuvAs1+2NC/qr6NF+PNwvUJwdkzliUFgAADS=",
```

```
37.         finishedMsg: "
No more images
",
38.         msg: null,
39.         msgText: "
Loading
",
40.         selector: null,
41.         speed: 'fast',
42.         start: undefined
43.     },
44.     navSelector: ".wp-pagenavi",
45.     nextSelector: ".nextpostslink",
46.     itemSelector: ".ct-gallery-item",
47.     extraScrollPx: 0,
48.     prefill: true
49. }, function( newElements ) {
50.     $container.imagesLoaded(function(){
51.         $(newElements).removeClass('hidden');
52.         $container.isotope('appended', $(newElements));
53.
54.     });
55. });
56. }
57. });
58.
59. $('<code>.ct-js-gallery-filters a</code>').click(function () {
60.     $('<code>.ct-js-gallery-filters .active</code>').removeClass('active');
61.     $(this).addClass('active');
62.
63.     var selector = $(this).attr('data-filter');
64.     $container.isotope({
65.         filter: selector, animationOptions: {
66.             duration: 750, easing: 'linear', queue: false
67.         }
68.     });
69.     return false;
70. });
71. }
72. });
73. }(jQuery));
```

Sources & Credits

The following sources and files have been used to build up this theme

- Twitter Bootstrap - <http://twitter.github.com/bootstrap/> (<http://getbootstrap.com/>)
- jQuery - <http://www.jquery.com> (<http://www.jquery.com>)
- Slick - <http://kenwheeler.github.io/slick/> (<http://kenwheeler.github.io/slick/>)
- Skrollr - <https://github.com/Prinzhorn/skrollr> (<https://github.com/Prinzhorn/skrollr>)

Once again, thank you so much for purchasing this theme. If you have any questions, feel free to email me via my user page contact form (<http://themeforest.net/user/createit-pl>).

Copyright createIT (<http://www.createit.pl/en/>) 2015 made with the Documenter v2.0 (<http://rxa.li/documenter>)