

CONTENTS

- [Intro](#)
- [HTML Structure](#)
- [CSS Files and Structure](#)
- [JavaScript](#)
- [PSD Files](#)
- [Contact/Newsletter Form](#)
- [Twitter settings](#)
- [Sources and Credits](#)

OCTAVUS SITE TEMPLATE

By *ThemeWoodmen*

Created: May 07, 2013. Last Update: May 07, 2013

Thank you for purchasing our site template! If you have any questions that are beyond the scope of this help file, please feel free to email via my user page [contact form](#). Thanks so much!

HTML STRUCTURE

This theme is built upon bootstrap framework and is fully responsive. It adapts to window resolution and looks good on all devices including ipad and iphone.

See for yourself (resize your browser).

MAIN MENU AND SITE LOGO

Main menu is fix to the top of the viewport and include support for a site logo and dropdown menu.


Bootstrap implements responsive menu – for example: on ipad and iphone it will be shown after click (resize your browser and see yourself).

```
1 <!-- main menu -->
2
3 <div class="headerBoxedWrapper">
4
5 <!-- II version of mobile menu - add mobileSelectNav class -->
6 <div class="navbar navbar-static-top">
7 <div class="navbar-inner">
8 <div class="container">
9 <!-- site logo -->
10 <a class="brand" href="index.html">
13 MENU
14 </button>
15
16 <div class="nav-collapse">
17 <ul class="nav pull-left" id="nav">
18 <!-- simple link -->
19 <li class="active">
20 <a href="index.html">Home</a>
21 </li>
22 <li>
23 <a href="02-about.html">About</a>
24 </li>
25 <li>
26 <a href="03-services.html">Services</a>
27 </li>
28 <!-- dropdown menu -->
29 <li class="dropdown">
30 <a href="09-shortcodes.html" class="dropdown-toggle"
31 <ul class="dropdown-menu">
32 <li><a href="09-shortcodes.html">Shortcodes</a></li>
33 <li><a href="10-icons.html">Icons</a></li>
34 <li><a href="11-404.html">404 page</a></li>
35 <li class="dropdown-submenu"><a href="#">Submenu
36 <ul class="dropdown-menu unstyled">
37 <li class="dropdown-submenu"><a href="#"
38 <ul class="dropdown-menu unstyled">
39 <li><a href="#">Page1</a></li>
40 <li><a href="#">Page2</a></li>
```

```

41                                     </ul>
42                                     </li>
43                                     <li><a href="#">On Third Level</a></li>
44                                     <li><a href="#">Navigation Item</a></li>
45                                     </ul>
46                                 </li>
47                             </ul>
48                         </li>
49                         (...)
50                         <li>
51                             <a href="#08-contact.html">Contact</a>
52                         </li>
53                     </ul>
54                 </div>
55             <!-- / nav-collapse -->
56
57         <!-- search form -->
58         <div class="searchWrapper">
59             <a href="#" class="searchIcon" id="searchIcon1"></a>
60
61             <div class="searchForm">
62                 <form>
63                     <fieldset>
64                         <input type="text" placeholder="Search">
65
66                         <div class="bg-icon">
67                             <input type="submit" value="search">
68                         </div>
69                     </fieldset>
70                 </form>
71             </div>
72         </div>
73     <!-- / searchWrapper -->
74
75
76         </div>
77     </div>
78 </div>
79 </div>
80 <!-- / headerBoxed Wrapper -->

```



MOBILE MENU

Mobile menu will appear when browser size < 979px. You can choose between 2 versions. To turn on II version just add "mobileSelectNav" to "navbar" div:

```

1 | <div class="navbar navbar-static-top mobileSelectNav">
2 | (...)

```

Standard version

HOME

ABOUT

SERVICES

ELEMENTS

SHORTCODES

ICONS

404 PAGE

SUBMENU

THIS IS AN EXAMPLE

PAGE1


PAGE2

ON THIRD LEVEL

NAVIGATION ITEM

PORTEFOLIO

Il version

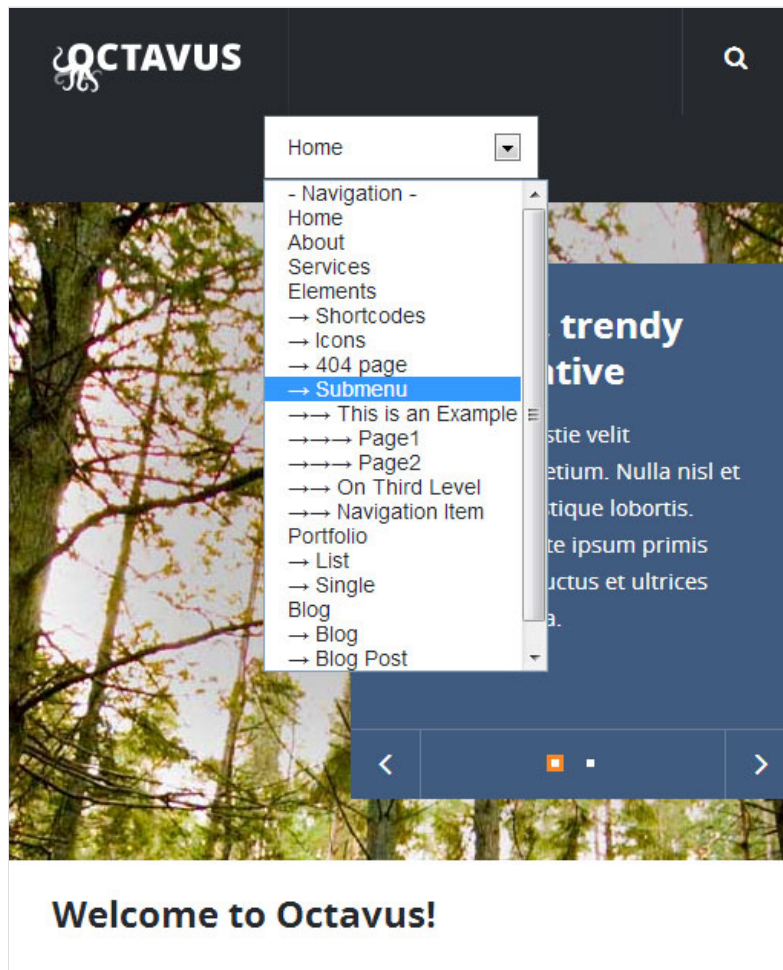

MENU FIXED TO TOP

Just add "fixed-menu-navbar" class to body – menu will be fixed to page top. To move down the hidden area we add margin-top to body div.

```
1 | <body class="boxed fixed-menu-navbar">
2 | (...)
```



GRID SYSTEM AND SINGLE ROW STRUCTURE

The default Bootstrap grid system utilizes 12 columns. It's responsive grid and adapts to viewport. Below 767px viewports, the columns become fluid and stack vertically. The fluid grid system uses percents instead of pixels for column widths. Each row always include 12 columns (for example span8+span4 = span12).

Bootstrap documentation: [here](#)

Basic fluid grid HTML:


```
1 <div class="row-fluid">
2   <div class="span4">
3     <div class="row-fluid">
4       <div class="span6"></div>
5       <div class="span6"></div>
6     </div>
7   </div>
8   <div class="span8"></div>
9 </div>
```

?

BOXED LAYOUT


If you want to set boxed layout please add to <body> tag class="boxed".

You can also choose background pattern (add second class to body). For example : to add first pattern create <body class="boxed pat1"> tag.

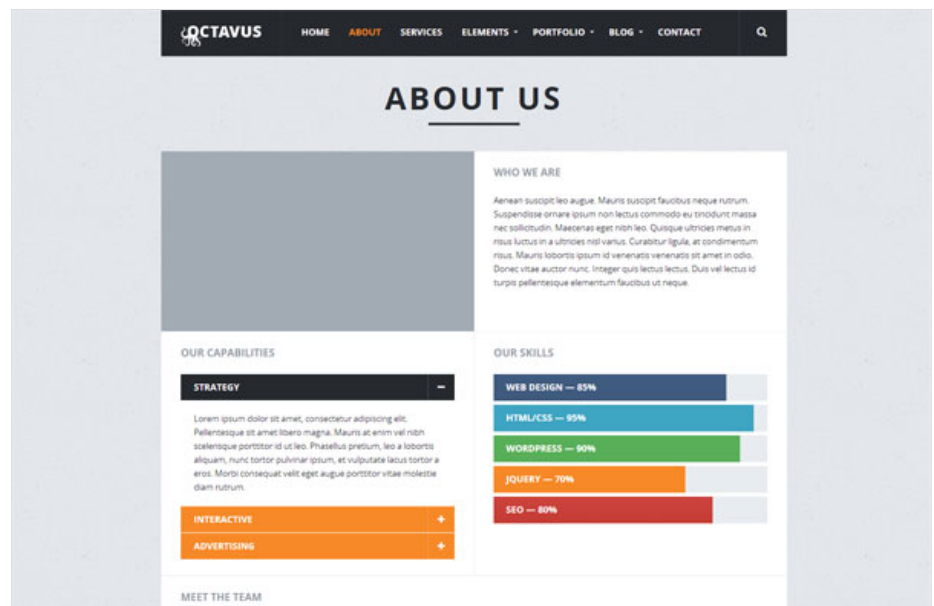

FULL WIDTH LAYOUT

In this mode header bar and footer bar will be 100% width. Just remove "boxed" class from body tag.

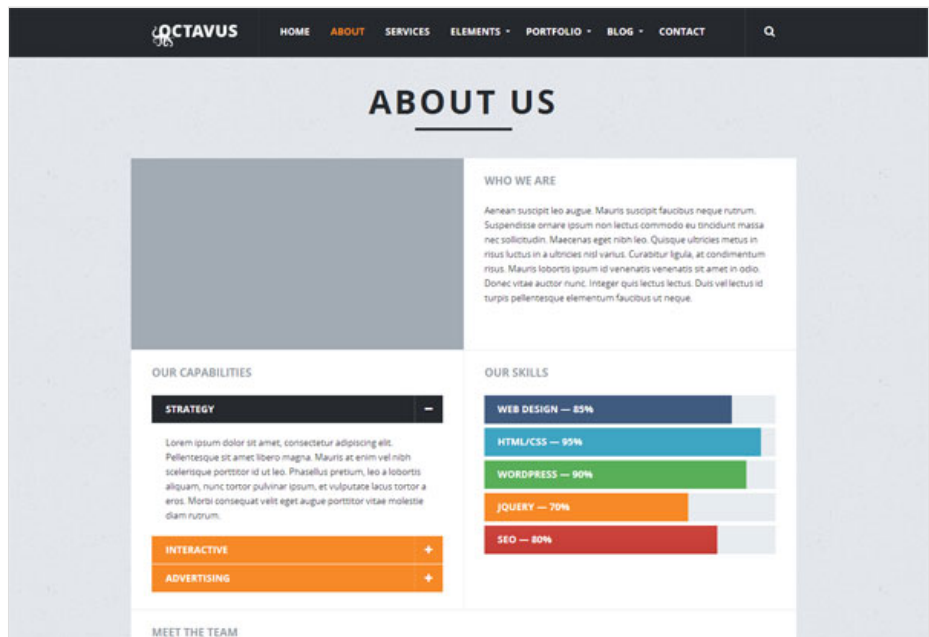


BUTTONS

Default link button has .btn class, other version has classes .btn .btn-primary.

```

1 | <!-- buttons examples -->
2 |
3 | <a href="#" class="btn">Apply</a>
4 | <a href="#" class="btn btn-primary">Apply</a>

```

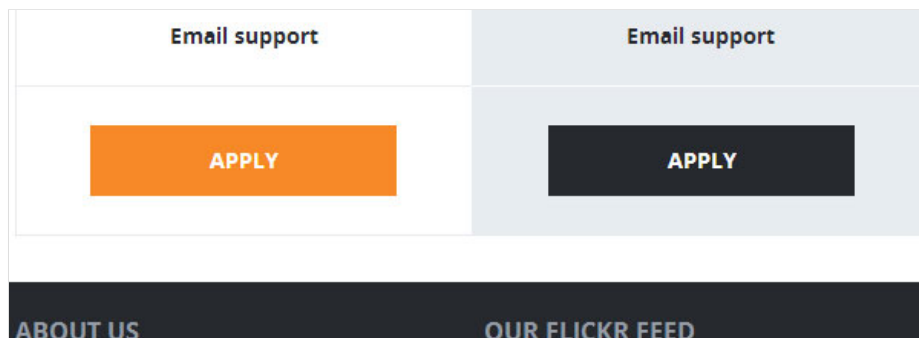

ACCORDION

Accordion is a vertically stacked list of items. Each item can be "expanded" or "stretched" to reveal the content associated with that item. Please remember that div "accordion" should have unique id (for example accordion533), and also each item should have unique id (#collapse748 and collapse748).

HTML Markup:

```


1 | <div id="accordion535" class="accordion">
2 |   <!-- open accordion, 3 diff: add "active" class, class "in" add to collapse,
3 |   <div class="accordion-group">
4 |     <div class="accordion-heading">
5 |       <a class="accordion-toggle active" href="#collapse850" data-toggle="
6 |     </div>
7 |     <div id="collapse850" class="accordion-body collapse in">
8 |       <div class="accordion-inner"><p>Sed id eros felis. Phasellus in eros
9 |     </p></div>
10 |   </div>
11 | </div>
12 | <div class="accordion-group">
13 |   <div class="accordion-heading">
14 |     <a class="accordion-toggle" href="#collapse851" data-toggle="collaps
15 |   </div>
16 |   <div id="collapse851" class="accordion-body collapse" style="height: 0px
17 |     <div class="accordion-inner"><p>Sed id eros felis. Phasellus in eros
18 |   </p></div>
19 | </div>

```

```

20     </div>
21     <div class="accordion-group">
22         <div class="accordion-heading">
23             <a class="accordion-toggle" href="#collapse852" data-toggle="collaps
24         </div>
25         <div id="collapse852" class="accordion-body collapse" style="height: 0px
26             <div class="accordion-inner"><p>Mauris s4agittis adipiscing ultrices
27         </div>
28     </div>
29 </div>
30 <!-- / accordion -->

```

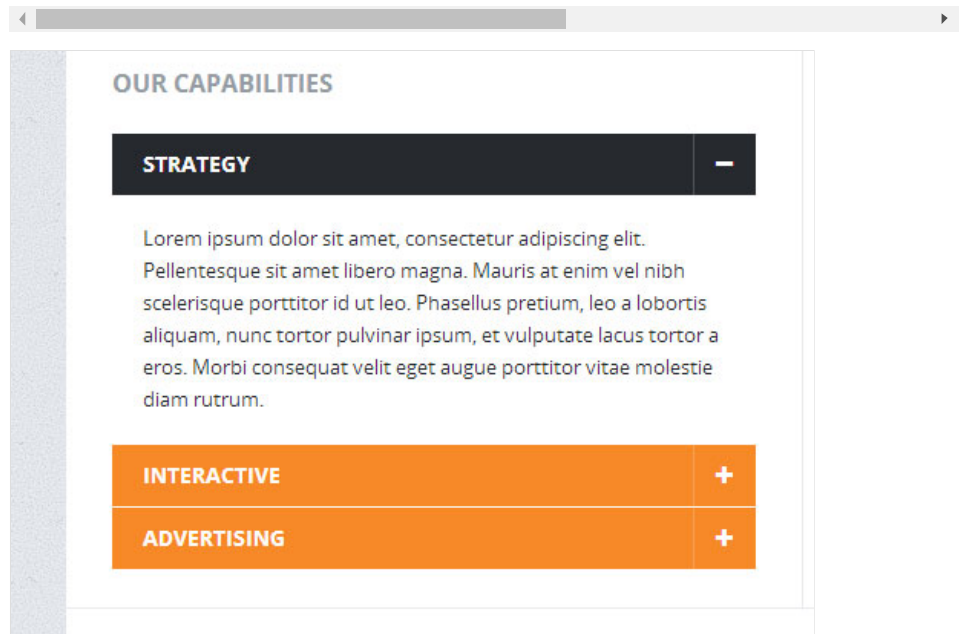

PROGRESS BARS

Bar where you can set your skill level. Just set width value in percents. Classes like "progress-info, progress-success, progress-warning, progress-danger" changes bar color.


HTML markup:

```

1     <div class="progress">
2         <span class="skillBar">Web Design – 85%</span>
3         <div class="bar" style="width: 85%"></div>
4     </div>
5
6
7     <div class="progress progress-info">
8         <span class="skillBar">HTML/CSS – 95%</span>
9         <div class="bar" style="width: 95%"></div>
10    </div>
11
12
13    <div class="progress progress-success">
14        <span class="skillBar">WordPress – 90%</span>
15        <div class="bar" style="width: 90%"></div>
16    </div>
17
18
19    <div class="progress progress-warning">
20        <span class="skillBar">jQuery – 70%</span>
21        <div class="bar" style="width: 70%"></div>
22    </div>
23
24
25    <div class="progress progress-danger">
26        <span class="skillBar">SEO – 80%</span>
27        <div class="bar" style="width: 80%"></div>
28    </div>

```

OUR SKILLS

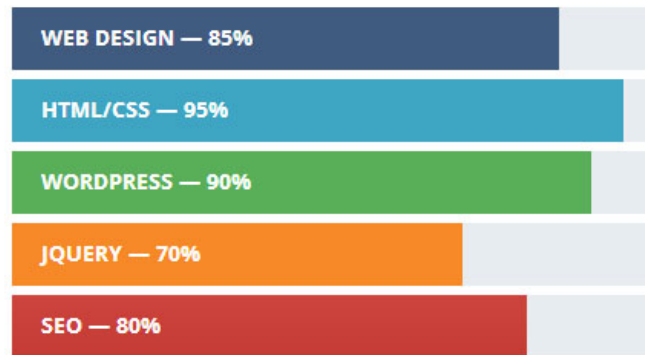

PRICING TABLES

You can show your price plan by using price tables.

STANDARD	PREMIUM	PROFESSIONAL
\$10 per month	\$20 per month	\$35 per month
50 transactions	200 transactions	Unlimited transactions
1 bank feed	3 bank feed	5 bank feed
Email support	Email support	Email & phone support
APPLY	APPLY	APPLY

Example HTML markup:

```
1 <div class="priceBox">
2   <span class="light">Standard</span>
3
4   <span class="emphasis">
5     $10
6     <em>per month</em>
7   </span>
8
9   <span>50 transactions</span>
10
11  <span>1 bank feed</span>
12
13  <span>Email support</span>
14
15  <span>
16    <a href="#" class="btn btn-primary">Apply</a>
17  </span>
18
19 </div>
20 <!-- / priceBox -->
21
22 <div class="priceBox spec">
23   <span class="light">Premium</span>
24
25   <span class="emphasis">
26     $20
27     <em>per month</em>
28   </span>
29
30   <span>200 transactions</span>
```



```

32     <span>3 bank feed</span>
33
34     <span>Email support</span>
35
36     <span>
37       <a href="#" class="btn">Apply</a>
38     </span>
39
40 </div>
41 <!-- / priceBox -->

```

TABS


You can click tabs to swap between content that is divided into logical sections. Remember that each nav-tab item and tab-content item should have unique id (for example #tab1 and tab1).

HTML markup:

```

1 <!-- tabs -->
2 <ul class="nav nav-tabs">
3   <li class="active"><a data-toggle="tab" href="#tab1">First tab</a></li>
4   <li class=""><a data-toggle="tab" href="#tab2">Second tab</a></li>
5   <li class=""><a data-toggle="tab" href="#tab3">Third tab</a></li>
6 </ul>
7
8 <div class="tab-content">
9   <div id="tab1" class="tab-pane active">
10     <p>
11       Commodo tempor. Etiam tristique, nisl ut pulvinar sagittis, lectus e
12     </p>
13   </div>
14   <div id="tab2" class="tab-pane">
15     <p>
16       Aactorial non deposit quid pro quo hic escorol. .
17     </p>
18   </div>
19   <div id="tab3" class="tab-pane">
20     <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit. Mauris tempu
21       nisl.
22     </p>
23   </div>
24 </div>
25 </div>
26 <!-- / tabs -->
27

```

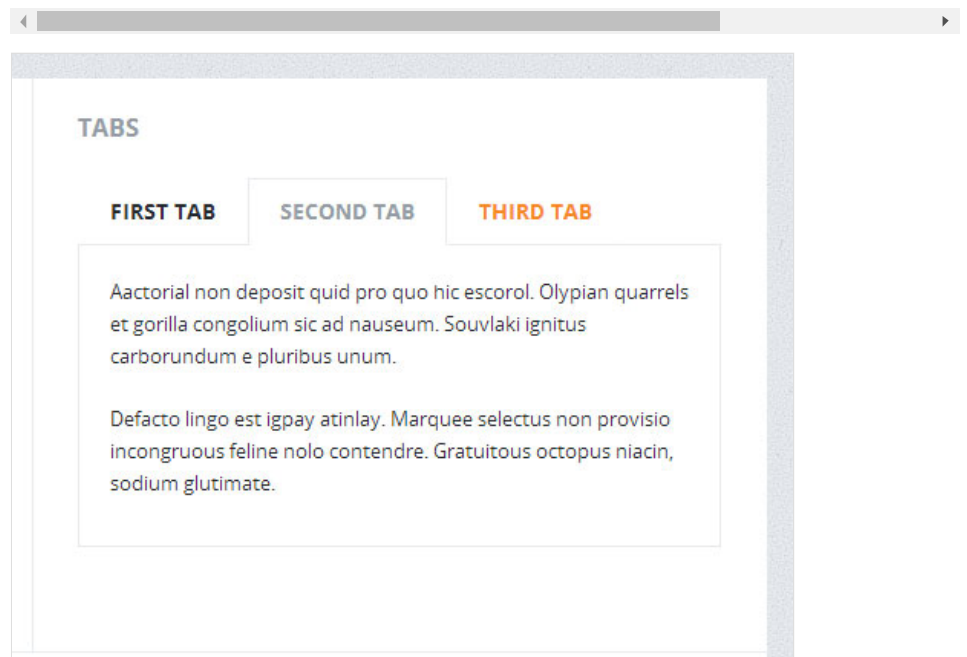

ICONS

On page 10-icons.html you can find all available +600 "icons font". We included :

Awesome Icons – <http://fortawesome.github.io/Font-Awesome/>

More Awesome Icons – Socials – <http://gregoryloucas.github.io/Font-Awesome-More/>

Batch Icons – <http://adamwhitcroft.com/batch/>

HTML markup:

```
1 <!-- Awesome Icons -->
2 <i class="icon-phone-sign"></i>
3
4 <!-- Batch Icons -->
5 <i class="batch audio-mute"></i>
```

?

CSS FILES AND STRUCTURE

We've included style.css which contains all necessary styles.

Main CSS file: style.css includes:

1. Bootstrap Library
2. General Styles
3. Font Face
4. headers
5. lines
6. paragraphs
7. links
8. photos style
9. nav menu
10. buttons
11. forms
12. flat columns
13. blog page
14. COMPONENTS
 - workItems
 - promo
 - icon box
 - blockquote
 - social bar
 - tweets
 - post preview box
 - custom google map
 - progress bars
 - person box
 - tables
 - price box
 - accordion
 - tabs
15. footer
16. flickr images
17. page 404
18. back to top link
19. utility
20. PLUGINS
 - Colorbox
 - Isotope
 - Flexslider
 - Sliders
21. media queries, adjustments
 - @media (max-width: 979px){}
 - @media (max-width: 767px) {}
 - @media (max-width: 480px) {}

If you want to modify or add new styles please find this lines in style.css :

```

/** ***** **/
/** GENERAL STYLES **/
/** ***** **/
/** START EDIT HERE **/

```

Below you can add your code.

COLOR VARIATIONS

You can change 2 motives colors and adapt design to suits your needs. Below you find ready css with 2 main colors, just replace with your own and add it at the bottom of css file.

```

1  /* I motive color */
2
3  .blogItem ul li:before {
4    color: #405b7f;
5  }
6
7  .blogItem blockquote:before {
8    color: #405b7f;
9  }
10
11 .social {
12   background: #405b7f;
13 }
14
15 .progress .bar {
16   background: #405b7f;
17 }
18
19 .pretty-table table thead th {
20   background-color: #405b7f;
21 }
22
23 .priceBox .light {
24   background: #405b7f;
25   border-left: 1px solid #405b7f;
26   border-right: 1px solid #405b7f;
27 }
28
29 .pg404 .errorNumber {
30   color: #405b7f;
31 }
32 #toTop:hover {
33   background: #405b7f;
34 }
35
36 .flexFull.flexslider .sliderDesc {
37   background: #405b7f;
38 }
39 .flexFull.flexslider .sliderBox {
40   background: #405b7f;
41 }
42
43 .flexFull.flexslider .sliderDesc {
44   background: #405b7f;
45 }
46 .flexFull.flexslider .navFlexFull {
47   background: #405b7f;
48 }
49
50
51 /* II motive color */
52
53
54 a:hover,
55 a:focus {
56   color: #f78927;
57 }
58
59 .navbar .nav > .active > a,
60 .navbar .nav > .active > a:hover,
61 .navbar .nav > .active > a:focus {
62   color: #f78927;
63 }
64
65
66 .navbar .nav > li > a:focus,
67 .navbar .nav > li > a:hover {
68   color: #f78927;
69 }
70
71 .dropdown-menu li > a:hover,
72 .dropdown-menu li > a:focus,
73 .dropdown-submenu: hover > a {
74   color: #f78927;

```

```

75 }
76
77 .navbar .nav li.dropdown.active > .dropdown-toggle,
78 .dropdown-menu .active > a,
79 .dropdown-menu .active > a:hover {
80   color: #f78927;
81 }
82
83 .navbar .nav li.dropdown.open > .dropdown-toggle,
84 .navbar .nav li.dropdown.open.active > .dropdown-toggle,
85 .navbar .nav li.dropdown:hover > a,
86 .navbar .nav li.dropdown.active:hover > a {
87   color: #f78927;
88 }
89
90
91 .searchForm .bg-icon {
92   background: #f78927;
93 }
94
95 .btn:hover {
96   background-color: #f78927;
97   *background-color: #f78927;
98 }
99
100 .btn.active,
101 .btn:active {
102   background-color: #f78927;
103 }
104
105 .btn-primary {
106   background: #f78927;
107 }
108 input[type="submit"] {
109   background: #f78927;
110 }
111
112 #footer input[type="submit"]:hover {
113   background: #f78927;
114 }
115
116 .blogItem p a {
117   color: #f78927;
118 }
119
120 .pager li > a:hover,
121 .pager li.active > a {
122   color: #f78927;
123 }
124
125 ul.commentList .comment-reply-link:hover {
126   color: #f78927;
127 }
128
129 .workItem .cOverlay {
130   background: #f78927;
131 }
132
133 blockquote.special {
134   background: #f78927;
135 }
136
137 blockquote.special:before {
138   border-color: #f78927 transparent transparent;
139 }
140
141 .smallSocials a:hover {
142   background: #f78927;
143 }
144
145 .tweetFeed li p a {
146   color: #f78927;
147 }
148
149 .customMapMarker i:before {
150   color: #f78927;
151 }
152 .addressBox a {
153   color: #f78927;
154 }
155
156 .progress-warning .bar,
157 .progress .bar-warning {
158   background: #f78927;
159 }
160
161 .accordion-heading .accordion-toggle {
162   background: #f78927;
163 }
164
165 .nav-tabs > li > a:hover {
166   color: #f78927;
167 }
168 .flickr_badge_image:hover a:before {
169   border: 2px solid #f78927;
170 }
171 .pg404 a {

```

```
172     color: #f78927;
173   }
174
175   #galleryOptions li a:hover {
176     color: #f78927;
177   }
178
179   .flexCarousel .flexslider .flex-direction-nav a:hover {
180     background: #f78927;
181   }
182
183   .flexFull.flexslider .flex-direction-nav a:hover {
184     background: #f78927;
185   }
186
187   .flexFull.flexslider .flex-control-paging li a.flex-active {
188     border: 3px solid #f78927;
189   }
190
191
192   .nav-collapse .nav > li > a:hover,
193   .nav-collapse .dropdown-menu a:hover {
194     color: #f78927;
195   }
```

JAVASCRIPT


All javascripts are placed in folder /js. In main.js file we implement all functions calls. This theme uses following Javascript files:

1. Bootstrap v2.2.2 framework (powerful front-end framework for faster and easier web development)
2. jQuery 1.9.1 (A fast javascript library that simplifies how to traverse HTML documents, handle events, perform animations.)
3. Isotope v1.5.25 – An exquisite jQuery plugin for magical layouts
4. FlexSlider 2
5. Colorbox – a jQuery lightbox
6. Infobox for Google Maps
7. SelectNav for custom mobile menu
8. Nivo Slider – jQuery Image Slider

ISOTOPE PLUGIN

On Portfolio page we use Isotope. This plugin filters work items with a nice animation
Documentation: [plugin homepage](#)

4 COLUMN PORTFOLIO

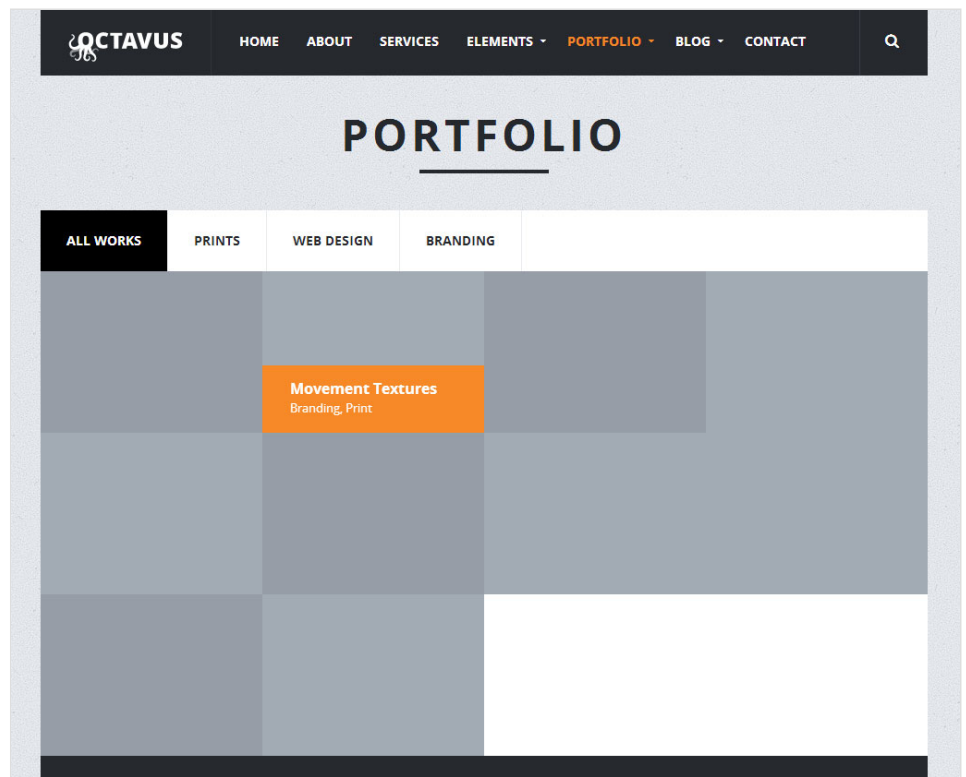

This is HTML markup we use:

Plugin measures photos and try to fit them in container. So, by adding smaller or bigger images you can change number of columns.

```

1 <!-- filter menu -->
2 <div id="galleryOptions" class="clearfix">
3   <ul id="filters" class="option-set clearfix">
4     <li><a href="#filter=*" class="selected">All Works</a></li>
5     <li><a href="#filter=.prints">Prints</a></li>
6     <li><a href="#filter=.webdesign">Web Design</a></li>
7     <li><a href="#filter=.branding">Branding</a></li>
8   </ul>
9 </div>
10 <!-- #options -->
11
12
13 <!-- ***** -->
14 <!-- *** ITEMS START *** -->
15
16 <div class="galleryContainer">
17   <div id="iContainer" class="clickable clearfix">
18     <div class="galleryItem branding webdesign">
19       <div class="workItem">
20         <a href="images/content/photo50.jpg" class="colorUp">
21           
22
23           <div class="cOverlay">
24             <span class="cTitle">Movement Textures</span>
25             <span class="cTag">Branding, Print</span>
26           </div>
27         </a>
28       </div>
29     </div>
30 </div>
31 <!-- / galleryItem -->
32
33 <div class="galleryItem prints">
34   <div class="workItem">
35     <a href="images/content/photo50.jpg" class="colorUp">
36       
37
38       <div class="cOverlay">
39         <span class="cTitle">Movement Textures</span>
40         <span class="cTag">Branding, Print</span>
41       </div>
42     </a>
43   </div>
44 </div>
45 <!-- / galleryItem -->
46 (..)

```

and js:

```

1 // ISOTOPE INIT
2

```


```

3   jQuery.Isotope.prototype._getCenteredMasonryColumns = function () {
4       this.width = this.element.width();
5
6       var parentWidth = this.element.parent().width();
7
8       // i.e. options.masonry && options.masonry.columnWidth
9       var colW = this.options.masonry && this.options.masonry.columnWidth || // or
10          this.$filteredAtoms.outerWidth(true) || // if there's no items, use
11          parentWidth;
12
13       var cols = Math.floor(parentWidth / colW);
14       cols = Math.max(cols, 1);
15
16       // i.e. this.masonry.cols = ....
17       this.masonry.cols = cols;
18       // i.e. this.masonry.columnWidth = ...
19       this.masonry.columnWidth = colW;
20   };
21
22   jQuery.Isotope.prototype._masonryReset = function () {
23       // layout-specific props
24       this.masonry = {};
25       // FIXME shouldn't have to call this again
26       this._getCenteredMasonryColumns();
27       var i = this.masonry.cols;
28       this.masonry.colYs = [];
29       while (i--) {
30           this.masonry.colYs.push(0);
31       }
32   };
33   (...);
34   // All code you can find in main.js file

```

FLEXSLIDER

This is main page full-width slider. Implement with flexslider. It includes box with promo text. Preferred background image size is 1920px x 700px
 Documentation: [plugin homepage](#)

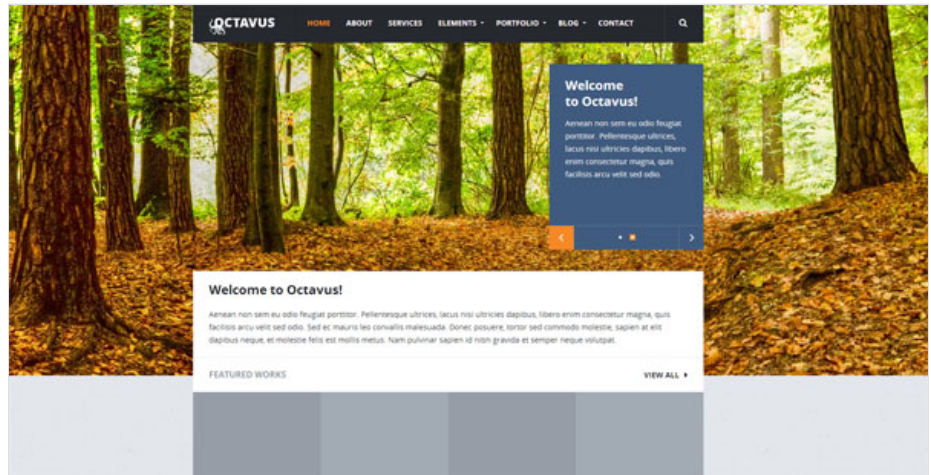

This is HTML markup we use:

```

1   <!-- full-width slider -->
2   </div> <!-- close container -->
3   <div class="mainslider">
4
5       <div class="flexslider flexFull loading-slider">
6
7           <div class="sliderBox">
8               <div class="navFlexFull">
9
10              </div>
11              <!-- / navFlexFull -->
12          </div>
13
14          <ul class="slides">
15              <li>
16                  <div style="background-image: url(images/content/full-slider1.jpg);">
17
18                      <div class="container">
19                          <div class="sliderDesc">
20                              <h2 class="medium">Modern, trendy<br>
21                              and creative</h2>
22                              <p>
23                                  Praesent molestie velit elementum pretium. Nulla nisl
24

```

```

25         </div>
26     </div>
27     <!-- / container -->
28
29     </div>
30 </li>
31 <li>
32     <div style="background-image: url(images/content/full-slider2.jpg);"
33         <div class="container">
34             <div class="sliderDesc">
35                 <h2 class="medium">Welcome <br>
36                     to Octavus!</h2>
37                 <p>
38                     Aenean non sem eu odio feugiat porttitor. Pellentesq
39                 </p>
40             </div>
41         </div>
42     </div>
43     <!-- / container -->
44 </li>
45 </ul>
46 </div>
47 <!-- / flexFull -->
48 </div>
49 <div class="container">
50 <!-- / full-width slider -->

```

and js:


```

1  jQuery(window).load(function () {
2      jQuery('.flexslider.flexFull').flexslider({
3          animation: "fade", //String: Select your animation type, "f
4          easing: "swing", //String: Determines the easing met
5          // easing types :
6          // swing, easeInQuad, easeOutQuad, easeInOutQuad, easeInCubic, easeOutCu
7          // easeInOutCubic, easeInQuart, easeOutQuart, easeInOutQuart, easeInQuin
8          // easeOutQuint, easeInOutQuint, easeInSine, easeOutSine, easeInOutSine,
9          // easeInExpo, easeOutExpo, easeInOutExpo, easeInCirc, easeOutCirc,
10         // easeInOutCirc, easeInElastic, easeOutElastic, easeInOutElastic, easeI
11         // easeOutBack, easeInOutBack, easeInBounce, easeOutBounce, easeInOutBou
12         direction: "horizontal", //String: Select the sliding direction,
13         reverse: false, //Boolean: Reverse the animation d
14         animationLoop: true, //Boolean: Should the animation loop? I
15         smoothHeight: false, //Boolean: Allow height of the sli
16         startAt: 0, //Integer: The slide that the slider sho
17         slideshow: true, //Boolean: Animate slider automatically
18         slideshowSpeed: 7000, //Integer: Set the speed of the slidesho
19         animationSpeed: 800, //Integer: Set the speed of animations,
20         initDelay: 0, //Integer: Set an initialization d
21         randomize: false, //Boolean: Randomize slide order
22
23         // Primary Controls
24         controlNav: true, //Boolean: Create navigation for paging
25         directionNav: true, //Boolean: Create navigation for previou
26
27         // Usability features
28         pauseOnAction: true, //Boolean: Pause the slideshow when inte
29         pauseOnHover: true, //Boolean: Pause the slideshow when hover
30         touch: true, //Boolean: Allow touch swipe navig
31         video: true, //Boolean: If using video in the sl
32         useCSS: false, //Boolean: Slider will use CSS3 t
33
34
35         // Secondary Navigation
36         keyboard: true, //Boolean: Allow slider navigating via k
37         multipleKeyboard: false, //Boolean: Allow keyboard navigati
38         mousewheel: false, //Boolean: Requires jquery.mou
39         controlsContainer: ".sliderBox .navFlexFull",
40
41
42         // Callback API
43         start: function () {
44             jQuery(".flexslider.flexFull").removeClass("loading-slider");
45         }
46     });
47 });
48
49
50 /* adjusting mainslider */
51 jQuery(document).ready(function () {
52     var navHeight = jQuery(".navbar-inner").height();
53     jQuery(".flexFull.flexslider .sliderDesc, .flexFull.flexslider .sliderBox").
54     jQuery(".flexFull.flexslider").css("margin-top", -navHeight);
55 });

```


It's flexslider jquery plugin. We implement client logos slider. Preferred image width is 216px.

Documentation: [plugin homepage](#)

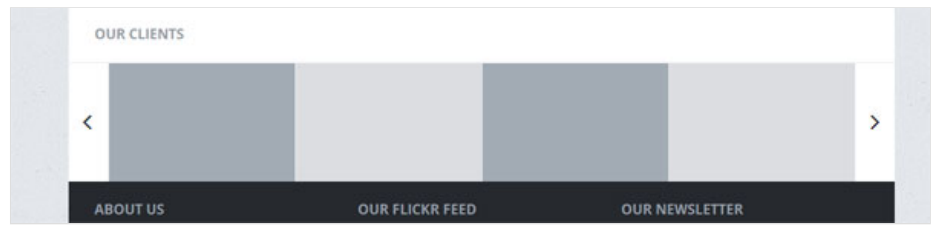

This is HTML markup we use:


```
1 <div class="flexCarousel">
2   <div class="flexslider">
3     <ul class="slides">
4       <li>
5         <a href="#">
6       </li>
7       <li>
8         <a href="#">
9       </li>
10      <li>
11        <a href="#">
12      </li>
13      <li>
14        <a href="#">
15      </li>
16      <li>
17        <a href="#">
18      </li>
19      <li>
20        <a href="#">
21      </li>
22      (... )
23    </ul>
24  </div>
25 </div>
26 <!-- / flexCarousel -->
```

```
1 function carouselFlexsliderInit() {
2   jQuery('.flexCarousel .flexslider').flexslider({
3     animation: "slide",
4     animationLoop: true,
5     slideshow: false,
6     itemwidth: 216, // {NEW} Integer: Box-model width of in
7     minItems: 1, // {NEW} Integer: Minimum number of carou
8     maxItems: 4, // {NEW} Integer: Maximum number of caro
9     move: 1, // {NEW} Integer: Number of carousel item
10    controlNav: false, // Boolean: Create navigation for paging
11    directionNav: true
12  });
13 }
14
15
16 jQuery(window).load(function () {
17   carouselFlexsliderInit();
18 });
```

NIVO SLIDER

The Nivo Slider is using transition effects ranging from slicing and sliding to fading and folding. There are 16 effects available.

Documentation: [plugin homepage](#)

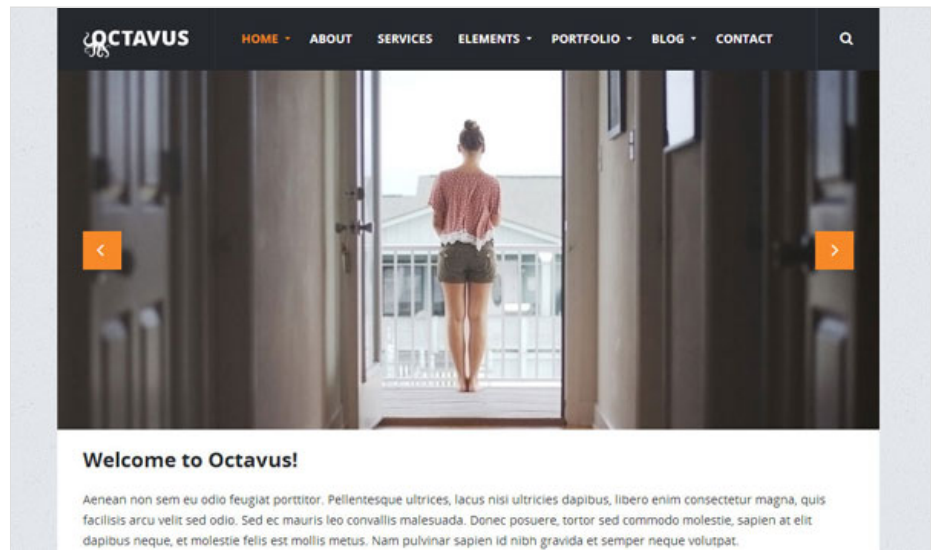

```

1 <div class="nivoGallery">
2   <div id="slider31" class="nivoSlider">
3     <a href="#"></a>
4     <a href="#"></a>
5   </div>
6 </div>
7 <!-- / nivoGallery -->

```


```

1 jQuery(window).load(function() {
2   jQuery('#slider31').nivoSlider({
3     effect: 'fade', // Specify sets like: 'fold,fade,sliceDown'
4     /* The effect parameter can be any of the following:
5      sliceDown, sliceDownLeft, sliceUp, sliceUpLeft, sliceUpDown, sliceUp
6      fade, random, slideInRight, slideInLeft, boxRandom, boxRain, boxRain
7     */
8     slices: 15, // For slice animations
9     boxCols: 8, // For box animations
10    boxRows: 4, // For box animations
11    animSpeed: 500, // Slide transition speed
12    pauseTime: 3000, // How long each slide will show
13    startSlide: 0, // Set starting Slide (0 index)
14    directionNav: true, // Next & Prev navigation
15    controlNav: false, // 1,2,3... navigation
16    controlNavThumbs: false, // Use thumbnails for Control Nav
17    pauseOnHover: true, // Stop animation while hovering
18    manualAdvance: false, // Force manual transitions
19    prevText: 'Prev', // Prev directionNav text
20    nextText: 'Next', // Next directionNav text
21    randomStart: false, // Start on a random slide
22    beforeChange: function(){}, // Triggers before a slide transition
23    afterChange: function(){}, // Triggers after a slide transition
24    slideshowEnd: function(){}, // Triggers after all slides have been shown
25    lastSlide: function(){}, // Triggers when last slide is shown
26    afterLoad: function(){} // Triggers when slider has loaded
27  });
28 });

```

TOOLTIPS

It's tooltip from bootstrap. You can add nice tooltip bubble show on link hover. We use this effect with social icons, but you can add tooltip to any link.

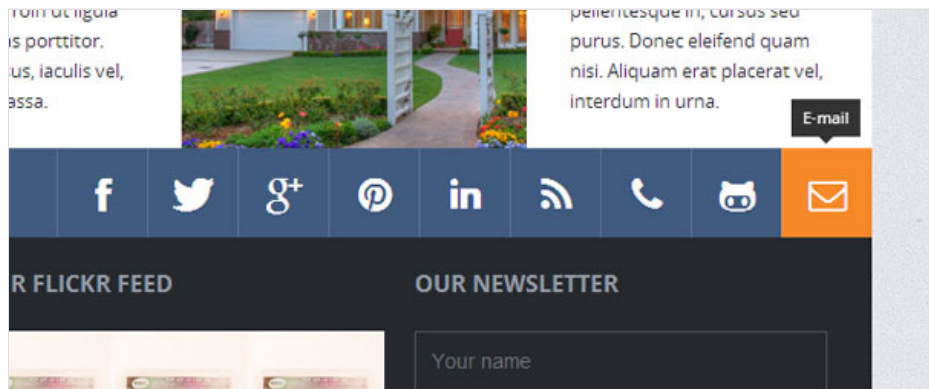

This is HTML markup we use:

```

1 | <a href="#" target="_blank" class="icon-facebook" data-toggle="tooltip" title="Facebook" >
2 |
3 | <-- or simple link, like: -->
4 |
5 | <a href="#" data-toggle="tooltip" title="Facebook">My link</a>

```

and js:

```

1 | function tooltipInit() {
2 |     jQuery("[data-toggle='tooltip']").tooltip();
3 | }

```

COLORBOX

It's a lightweight customizable lightbox plugin for jQuery. After image clicking fullsize image will show up in popup.

To turn on colorbox just add "ColorUp" class to link with fullwidth image.

Parameter in javascript "rel" group all images with .colorUp class in Set.

Documentation: [plugin homepage](#)



This is HTML markup we use:

```

1 | <a href="images/content/photo50.jpg" class="colorUp">
2 |     
3 | </a>

```

and js:

```


1  /* colorbox init */
2  jQuery(document).ready(function () {
3
4      jQuery('a.colorUp').colorbox({
5          rel: 'gal',
6          maxWidth: "95%"
7      });
8
9  });

```

CUSTOM GOOGLE MAP

Google Map on contact page is customize using this plugin. You can define HTML marker in javascript call. Default height is 350px but you can change it in inline map_canvas style.

Documentation: [plugin homepage](#)

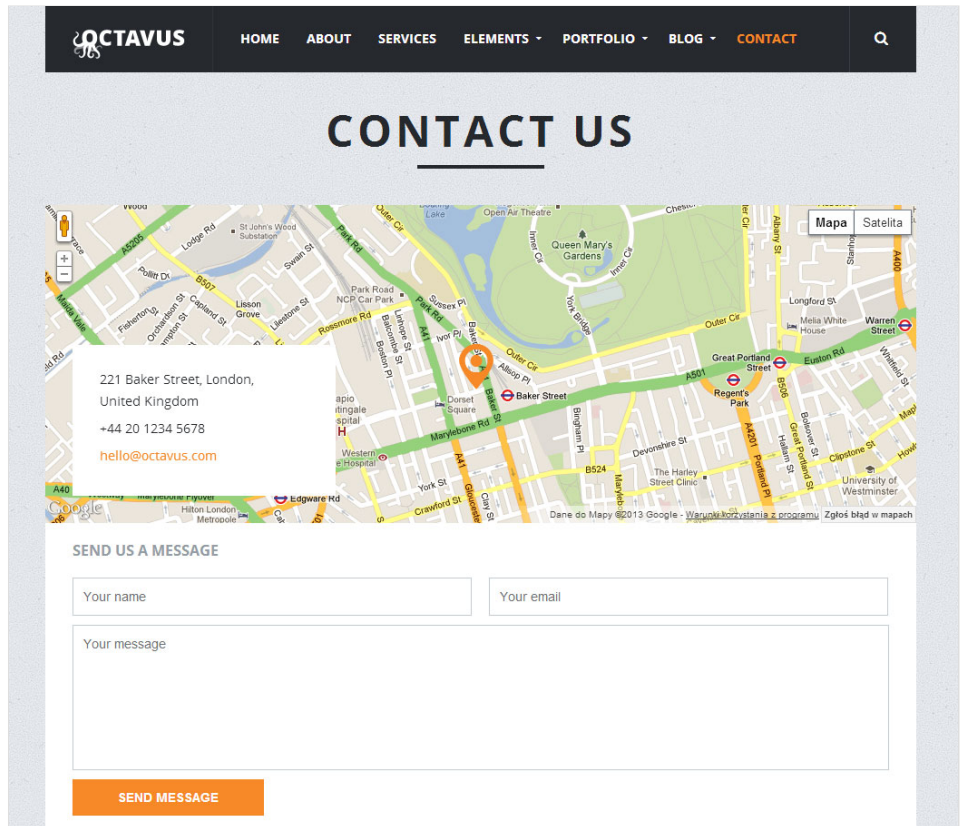

```

1  <!-- custom google map -->
2
3      <div class="gMapCustom">
4          <div class="addressBox">
5              <p>
6                  221 Baker Street, London,<br>
7                  United Kingdom
8              </p>
9              <p>
10                 +44 20 1234 5678
11             </p>
12             <p>
13                 <a href="#">hello@octavus.com</a>
14             </p>
15         </div>
16         <div id="map_canvas" style="width: 100%; height: 350px">
17
18         </div>
19     </div>
20 <!-- / custom google map -->

```

and js (Code is uniquely attached to the 08-contact.html) :

```

1  <script>
2  /* custom google map marker */
3
4      function initializeMap() {
5          var secheltLoc = new google.maps.LatLng(51.523800, -0.15836);
6
7          var myMapOptions = {
8              zoom: 15
9              ,center: secheltLoc

```

```

10         ,mapTypeId: google.maps.MapTypeId.ROADMAP
11     };
12     };
13     var theMap = new google.maps.Map(document.getElementById("map_canvas"),
14
15
16     var marker = new google.maps.Marker({
17         map: theMap,
18         draggable: true,
19         position: new google.maps.LatLng(51.523800, -0.15836),
20         visible: false
21     });
22
23     var boxText = document.createElement("div");
24     boxText.style.cssText = " ";
25     boxText.innerHTML = "<div class='customMapMarker'><i class='batch pin-2'
26
27     var myOptions = {
28         content: boxText
29         ,disableAutoPan: false
30         ,maxWidth: 0
31         ,pixelOffset: new google.maps.Size(-30, -30)
32         ,zIndex: null
33         ,boxStyle: {
34             background: " "
35             ,opacity: 1.0
36             ,width: "60px"
37             ,height: "60px"
38         }
39         ,closeBoxMargin: "10px 2px 2px 2px"
40         ,closeBoxURL: " "
41         ,infoBoxClearance: new google.maps.Size(1, 1)
42         ,isHidden: false
43         ,pane: "floatPane"
44         ,enableEventPropagation: false
45     };
46
47     google.maps.event.addListener(marker, "click", function (e) {
48         ib.open(theMap, this);
49     });
50
51     var ib = new InfoBox(myOptions);
52
53     ib.open(theMap, marker);
54 }
55
56
57     jQuery(window).load(function () {
58         initializeMap();
59     });
60
61 </script>

```

PSD FILES

There are 16 PSD files included in the project.

- 01-octavus-home.psd
- 01-octavus-home-hovers.psd
- 02-octavus-about.psd
- 02-octavus-about-hovers.psd
- 03-octavus-services.psd
- 04-octavus-portfolio.psd
- 04-octavus-portfolio-hovers.psd
- 05-octavus-portfolio-single.psd
- 05-octavus-portfolio-single-hovers.psd
- 06-octavus-blog.psd
- 07-octavus-blog-post.psd
- 07-octavus-blog-post-hovers.psd
- 08-octavus-contact.psd
- 08-octavus-contact-hovers.psd
- 09-octavus-shortcodes.psd
- 10-octavus-404.psd

Each PSD file is of course layered, layers are grouped into directories. If you'd like to change anything in the page layout, please put jpg/png image in HTML/img directory.

TYPOGRAPHY

In this theme we use Open Sans font :

- regular – standard text
- italic – font-style:italic; in css
- semibold – font-weight:600; in css
- bold – font-weight:700; in css

These lines of code include fonts : (placed in style.css file:)

```
1 @font-face{
2   font-family: 'Open Sans';
3   src: url('../css/font/OpenSans-Regular-webfont.eot');
4   src: url('../css/font/OpenSans-Regular-webfont.eot?#iefix') format('embedded-o
5   font-weight: 400;
6   font-style: normal;
7 }
8
9 @font-face{
10  font-family: 'Open Sans';
11  src: url('../css/font/OpenSans-Bold-webfont.eot');
12  src: url('../css/font/OpenSans-Bold-webfont.eot?#iefix') format('embedded-open
13  font-weight: 700;
14  font-style: normal;
15 }
16
17 @font-face{
18  font-family: 'Open Sans';
19  src: url('../css/font/OpenSans-Italic-webfont.eot');
20  src: url('../css/font/OpenSans-Italic-webfont.eot?#iefix') format('embedded-op
21  font-weight: 400;
22  font-style: italic;
23 }
24
25 @font-face{
26  font-family: 'Open Sans';
27  src: url('../css/font/OpenSans-SemiBold-webfont.eot');
28  src: url('../css/font/OpenSans-SemiBold-webfont.eot?#iefix') format('embedded-
29  font-weight: 600;
30  font-style: normal;
31 }
```

More info: www.fontsquirrel.com

CONTACT FORM

Template comes with ready to use Contact Form and Newsletter Form. Before you start using it, please make sure your server:

- uses PHP 5.2+
- your web server (like Apache) is configured to listen on directory form

CONFIGURATION

File js/contact-form.js contains javascript responsible for validating and sending messages. You can customize it's behaviour by setting:

- showErrors – should form display validation error messages? (default: true)
- sendingMessage – once submit button is clicked, it's text will be changed to this value (default: Sending...)
- debug – displays debug messages when problems occur. Please make sure that also in send.php \$debug = true.

Inside form directory you will find:

- config.php – Mail configuration which MUST be setup up before sending emails, please make sure that:
 - hostname, username and password are properly entered
 - in case of problems in sending messages, use \$debug = true variable to view any email errors
- main.html – this template will be used to render email message. Please note that

special placeholders are available in this file surrounded with {XXX} like {name}. This placeholders will be substituted with real content received from contact form.
table.html – similar to main.html template but used for "Book a Table" Form
send.php – this is where mail is actually being send for contact form
table.php – this is where mail is actually being send for book a table

Please make sure that debug variables are set to false on production!

TWITTER SETTINGS

New Twitter API requires authentication to display tweets from your account.
To make Twitter Feed work you need to create the 'application'
and generate 4 special keys for your twitter account via <https://dev.twitter.com/apps> :

- Consumer key (key)
- Consumer secret (secret)
- Access token (token)
- Access token secret (token_secret)

Video tutorial : <http://vimeo.com/60891535>

All configuration is placed in \twitter\config.php
here you have to set 4 generated keys and twitter account username:

```
1 | $config = array(  
2 |     'username' => "XXX", //username  
3 |     'limit' => 3, //how many tweets we would like to display?  
4 |     'with_replies' => true, //show replies? true or false  
5 |     'oauth_access_token' => 'TOKEN',  
6 |     'oauth_access_token_secret' => 'TOKEN_SECRET',  
7 |     'consumer_key' => 'KEY',  
8 |     'consumer_secret' => 'KEY_SECRET',  
9 | );
```

Twitter Feed requires web server (like Apache) with PHP.
That's it! Your latest tweets should appear automatically.

All Twitter Feed files :

- plugin file jquery.tweet.js (should be included at page)
- plugin call : `jQuery('.tweets').tweet({ ... });`
- \twitter directory uploaded
- `<div class="tweets"></div>` in template (script paste tweets inside div)

SOURCES AND CREDITS

The following sources and files have been used to build up this theme

Twitter Bootstrap – <http://twitter.github.com/bootstrap/>
jQuery – <http://www.jquery.com>
Isotope v1.5.25 – <http://isotope.metafizzy.co/docs/introduction.html>
FlexSlider 2 – <http://www.woothemes.com/flexslider/>
Colorbox – <http://www.jacklmoore.com/colorbox/>
Infobox for Google Maps – <http://google-maps-utility-library-v3.googlecode.com/svn/trunk/infobox/docs/reference.html>

SelectNav – <http://lukaszfiszer.github.io/selectnav.js/>

Awesome Icons – <http://fortawesome.github.io/Font-Awesome/>

More Awesome Icons – Socials – <http://gregoryloucas.github.io/Font-Awesome-More/>

Batch Icons – <http://adamwhitcroft.com/batch/>

Nivo Slider – <http://dev7studios.com/nivo-slider/>

Once again, thank you so much for purchasing this theme. If you have any questions, feel free to email me via my user page contact form.